



## Standard Efficiency Heat Pump Direct-Drive Packaged Rooftop Unit 7.5 - 10 Ton DFH Light Commercial

14.1 IEER / 11 EER



\* Complete warranty details available from your local distributor or manufacturer's representative or at [www.daikincomfort.com](http://www.daikincomfort.com) or [www.daikinac.com](http://www.daikinac.com)



## Our Perfect Package:

Harnessing energy-efficient performance, proven technology, and enhanced comfort for life.

Since becoming the first company in Japan to manufacture packaged air conditioning systems, in 1951, Daikin has supported comfortable indoor living based on the strengths and technologies that have led to the growth of the company becoming one of the world's largest manufacturers of HVAC products, systems and refrigerants.

Today, as a comprehensive global manufacturer of HVAC products and systems, the Daikin brand is committed to being recognized as a truly global and excellent company capable of continually creating new value for its customers. The company plans to pursue sustainable growth and foster business operations that consistently harmonize with the goals of improving indoor comfort.


The group philosophy of the company includes:

- » Creating new value continuously for customers
- » Developing world leading energy-saving technology
- » Being a flexible and dynamic organization
- » Allowing employees to be the driving force for the success of the company
- » Fostering an atmosphere of best practices, boldness, and innovation
- » Thinking and acting globally



# Contents

<b>2</b>	<b>Introduction</b>	2
<b>4</b>	<b>Nomenclature</b>	4
<b>5</b>	<b>Features and Benefits</b>	5
	Applications	8
	Serviceability	8
<b>9</b>	<b>Product Specifications</b>	9
	AHRI Ratings	12
	Sound Data	12
	Coil Dimensions	12
<b>13</b>	<b>Expanding Cooling Data</b>	13
<b>19</b>	<b>Electric Heater Data</b>	19
<b>20</b>	<b>Air Flow</b>	20
<b>32</b>	<b>Static Pressure</b>	32
<b>33</b>	<b>Heating Data</b>	33
<b>34</b>	<b>Electrical Data</b>	34
<b>41</b>	<b>Wiring Diagrams</b>	41
<b>42</b>	<b>Dimensional Data</b>	42
<b>43</b>	<b>Electrical Connections</b>	43
	Unit Clearances	43
<b>44</b>	<b>Installation</b>	44
	Weights	44

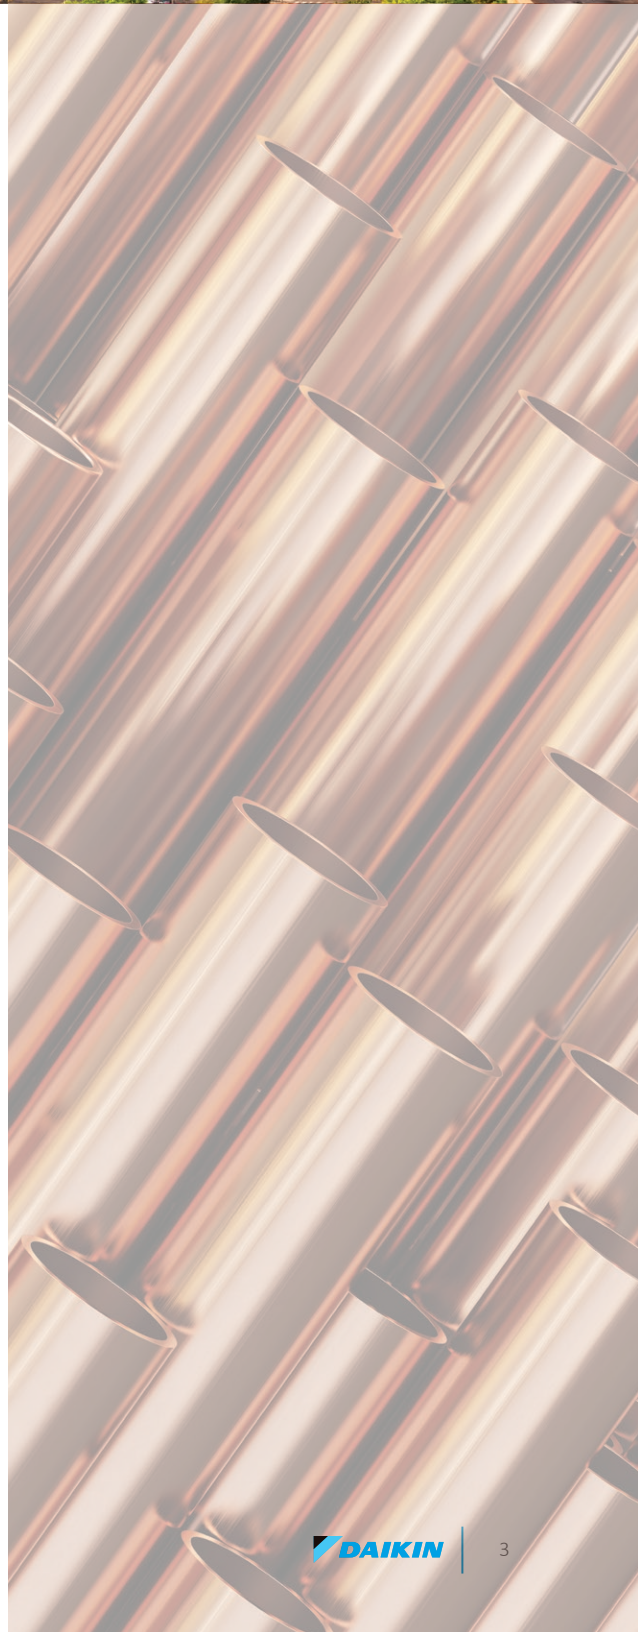

# Nomenclature

	D	F	H	120	3	D	XXX	C	X	A	X	X	X	X	X	X	X	X	A	*																																																																								
	1	2	3	4,5,6	7	8	9,10,11	12	13	14	15	16	17	18	19	20	21	22	23	24																																																																								
<b>Brand</b>	D Daikin																																																																																											
<b>Configuration</b>	F Standard Efficiency R High Efficiency																																																																																											
<b>Application</b>	C Cooling G Gas Heat H Heat Pump																																																																																											
<b>Nominal Cooling Capacity</b>	036 3 Tons    090 7½ Tons    240 20 Tons 048 4 Tons    102 8½ Tons    300 25 Tons 060 5 Tons    120 10 Tons 072 6 Tons																																																																																											
<b>Voltage</b>	1 208-230/1/60    4 460/3/60 3 208-230/3/60    7 575/3/60																																																																																											
<b>Supply Fan/Drive Type/Motor</b>	D Direct Drive - Standard Static L Direct Drive - Medium Static W Direct Drive - High Static																																																																																											
<b>Nominal Heating Capacity</b>	<table border="1"> <thead> <tr> <th>Gas/Electric</th> <th>A/C</th> <th>H/P</th> <th>Factory-Installed Electric Heat</th> </tr> </thead> <tbody> <tr><td>045 45,000 BTU/h</td><td>XXX</td><td>No Heat</td><td>XXX No Heat</td></tr> <tr><td>060 60,000 BTU/h</td><td>005</td><td>5kW</td><td>030 30 kW</td></tr> <tr><td>070 70,000 BTU/h</td><td>006</td><td>5kW</td><td>031 30 kW</td></tr> <tr><td>080 80,000 BTU/h</td><td>010</td><td>10 kW</td><td>032 30 kW</td></tr> <tr><td>090 90,000 BTU/h</td><td>011</td><td>10 kW</td><td>045 45kW</td></tr> <tr><td>100 100,000 BTU/h</td><td>015</td><td>15 kW</td><td>046 45kW</td></tr> <tr><td>115 115,000 BTU/h</td><td>016</td><td>15 kW</td><td>060 60kW</td></tr> <tr><td>125 125,000 BTU/h</td><td>017</td><td>15 kW</td><td>075 75kW</td></tr> <tr><td>130 130,000 BTU/h</td><td>018</td><td>18 kW</td><td></td></tr> <tr><td>140 140,000 BTU/h</td><td>020</td><td>20 kW</td><td></td></tr> <tr><td>150 150,000 BTU/h</td><td>021</td><td>20 kW</td><td></td></tr> <tr><td>180 180,000 BTU/h</td><td>022</td><td>20 kW</td><td></td></tr> <tr><td>210 210,000 BTU/h</td><td>023</td><td>20 kW</td><td></td></tr> <tr><td>225 225,000 BTU/h</td><td></td><td></td><td></td></tr> <tr><td>240 240,000 BTU/h</td><td></td><td></td><td></td></tr> <tr><td>350 350,000 BTU/h</td><td></td><td></td><td></td></tr> <tr><td>400 400,000 BTU/h</td><td></td><td></td><td></td></tr> </tbody> </table>																				Gas/Electric	A/C	H/P	Factory-Installed Electric Heat	045 45,000 BTU/h	XXX	No Heat	XXX No Heat	060 60,000 BTU/h	005	5kW	030 30 kW	070 70,000 BTU/h	006	5kW	031 30 kW	080 80,000 BTU/h	010	10 kW	032 30 kW	090 90,000 BTU/h	011	10 kW	045 45kW	100 100,000 BTU/h	015	15 kW	046 45kW	115 115,000 BTU/h	016	15 kW	060 60kW	125 125,000 BTU/h	017	15 kW	075 75kW	130 130,000 BTU/h	018	18 kW		140 140,000 BTU/h	020	20 kW		150 150,000 BTU/h	021	20 kW		180 180,000 BTU/h	022	20 kW		210 210,000 BTU/h	023	20 kW		225 225,000 BTU/h				240 240,000 BTU/h				350 350,000 BTU/h				400 400,000 BTU/h			
Gas/Electric	A/C	H/P	Factory-Installed Electric Heat																																																																																									
045 45,000 BTU/h	XXX	No Heat	XXX No Heat																																																																																									
060 60,000 BTU/h	005	5kW	030 30 kW																																																																																									
070 70,000 BTU/h	006	5kW	031 30 kW																																																																																									
080 80,000 BTU/h	010	10 kW	032 30 kW																																																																																									
090 90,000 BTU/h	011	10 kW	045 45kW																																																																																									
100 100,000 BTU/h	015	15 kW	046 45kW																																																																																									
115 115,000 BTU/h	016	15 kW	060 60kW																																																																																									
125 125,000 BTU/h	017	15 kW	075 75kW																																																																																									
130 130,000 BTU/h	018	18 kW																																																																																										
140 140,000 BTU/h	020	20 kW																																																																																										
150 150,000 BTU/h	021	20 kW																																																																																										
180 180,000 BTU/h	022	20 kW																																																																																										
210 210,000 BTU/h	023	20 kW																																																																																										
225 225,000 BTU/h																																																																																												
240 240,000 BTU/h																																																																																												
350 350,000 BTU/h																																																																																												
400 400,000 BTU/h																																																																																												
<b>Refrigeration Systems</b>	A Single stage cooling modes C Two stage cooling modes F Two stage cooling modes with Hot Gas Reheat and Low-ambient control																																																																																											
<b>Heat Exchanger</b>	X No options    U Ultra Low NoX Stainless Steel Exchanger A Standard Aluminized Exchanger S Stainless Steel Exchanger																																																																																											
<b>Controls</b>	A Electromechanical controls    B DDC w/ BACnet interface																																																																																											
<b>HP Stacking Models</b>	<table border="1"> <thead> <tr> <th>MODEL NUMBER</th> <th>CODE STRING</th> </tr> </thead> <tbody> <tr><td>DFH0903D000001S</td><td>DFH0903DXXXCAXXXXXXXXXX</td></tr> <tr><td>DFH0904D000001S</td><td>DFH0904DXXXCAXXXXXXXXXX</td></tr> <tr><td>DFH0907D000001S</td><td>DFH0907DXXXCAXXXXXXXXXX</td></tr> <tr><td>DFH1023D000001S</td><td>DFH1023DXXXCAXXXXXXXXXX</td></tr> <tr><td>DFH1024D000001S</td><td>DFH1024DXXXCAXXXXXXXXXX</td></tr> <tr><td>DFH1027D000001S</td><td>DFH1027DXXXCAXXXXXXXXXX</td></tr> <tr><td>DFH1203D000001S</td><td>DFH1203DXXXCAXXXXXXXXXX</td></tr> <tr><td>DFH1204D000001S</td><td>DFH1204DXXXCAXXXXXXXXXX</td></tr> <tr><td>DFH1207D000001S</td><td>DFH1207DXXXCAXXXXXXXXXX</td></tr> </tbody> </table>																				MODEL NUMBER	CODE STRING	DFH0903D000001S	DFH0903DXXXCAXXXXXXXXXX	DFH0904D000001S	DFH0904DXXXCAXXXXXXXXXX	DFH0907D000001S	DFH0907DXXXCAXXXXXXXXXX	DFH1023D000001S	DFH1023DXXXCAXXXXXXXXXX	DFH1024D000001S	DFH1024DXXXCAXXXXXXXXXX	DFH1027D000001S	DFH1027DXXXCAXXXXXXXXXX	DFH1203D000001S	DFH1203DXXXCAXXXXXXXXXX	DFH1204D000001S	DFH1204DXXXCAXXXXXXXXXX	DFH1207D000001S	DFH1207DXXXCAXXXXXXXXXX																																																				
MODEL NUMBER	CODE STRING																																																																																											
DFH0903D000001S	DFH0903DXXXCAXXXXXXXXXX																																																																																											
DFH0904D000001S	DFH0904DXXXCAXXXXXXXXXX																																																																																											
DFH0907D000001S	DFH0907DXXXCAXXXXXXXXXX																																																																																											
DFH1023D000001S	DFH1023DXXXCAXXXXXXXXXX																																																																																											
DFH1024D000001S	DFH1024DXXXCAXXXXXXXXXX																																																																																											
DFH1027D000001S	DFH1027DXXXCAXXXXXXXXXX																																																																																											
DFH1203D000001S	DFH1203DXXXCAXXXXXXXXXX																																																																																											
DFH1204D000001S	DFH1204DXXXCAXXXXXXXXXX																																																																																											
DFH1207D000001S	DFH1207DXXXCAXXXXXXXXXX																																																																																											
<b>Revision Levels</b>	Major & Minor																																																																																											
<b>PE Connection</b>	X No Options B Single-point power connection for Power Exhaust																																																																																											
<b>IAQ</b>	X No Options																																																																																											
<b>Service Options</b>	X No Option A Powered convenience outlet B Non-powered convenience outlet C Hinge Panels D Hinged Panels and Powered convenience outlet E Hinged Panels and non-powered convenience outlet																																																																																											
<b>Electrical</b>	X No Options A Non-Fused Disconnect B Phase Monitor C Thru-the-base connections E Non-Fused Disconnect and Phase Monitor F Non-Fused Disconnect and Thru-the-base connections H Phase Monitor and Thru-the-base connections L Non-Fused Disconnect, Thru-the-base connections and Phase Monitor																																																																																											
<b>Economizer</b>	X No Options A Ultra Low-Leak Downflow Economizer w/ Enthalpy Sensor B Low-Leak Downflow Economizer w/ Enthalpy Sensor E Ultra Low-Leak Downflow Economizer for DDC controls w/ Enthalpy Sensor G Ultra Low-Leak Downflow Economizer w/ Dry Bulb Sensor H Low-Leak Downflow Economizer w/ Dry Bulb Sensor L Ultra Low-Leak Downflow Economizer for DDC controls w/ Dry Bulb Sensor N Low-Leak Downflow Economizer for DDC controls w/ Enthalpy Sensor P Low-Leak Downflow Economizer for DDC controls w/ Dry Bulb Sensor																																																																																											
<b>Hail guard</b>	X No Options C Hail Guard																																																																																											
<b>Sensors</b>	X No Options A RA Smoke Detector B SA Smoke Detector C RA & SA Smoke Detector																																																																																											

## Features and Benefits

Daikin Packaged Rooftop Units (RTUs) are built to perform, with features and options that help provide low installation and operation costs, superior indoor air quality, efficient operation, and longevity.

### Installation

Daikin Packaged units are designed with fast and easy installation in mind and are ideal for both new construction and retrofit projects. Our packaged rooftop units are built to be a direct replacement for most rooftop units on the field without the need of a curb adapter, to be able to replace the unit in a shorter time and at a lower cost.

### Cabinet Construction

Daikin packaged rooftop units are made with high quality galvanized steel with a powder-paint finish to provide higher corrosion resistance.

- » Easy accessibility using our tool-less filter access.
- » Unit is fully insulated to prevent sweating and thermal losses, using our foil face fiberglass insulation which also omits exposed filter fibers into the airstream.
- » 1" Raised flanged edges around the supply and return offer easy installation for the duct connections.

- » The full perimeter base rail is built using heavy gauge galvanized steel for a stronger structural installation, the base rails are a minimum of 3 1/2" tall and include holes to allow for overhead rigging and lifting with forklifts.
- » Electrical lines and can be brought through the base of the unit or through the horizontal knockout for easy installation and accessibility on the field.

### Compressor

High performance, low noise scroll compressors to match the required total load.

- » Resiliently factory-mounted on rubber grommets for vibration isolation
- » Refrigeration circuit includes both high and low pressure safety switches.
- » Unit is factory charged with environmentally friendly R-410A refrigerant.
- » Two single stage scroll compressor individuality circuited for partial load applications.
- » Compressor location outside the condenser section to avoid air bypass.

### Supply Fan

The direct-drive with airfoil single width, single inlet (SWSI) Class II construction supply fan with aluminum fan + blades provides efficient and quiet operation at wide ranging static pressure and air flow requirements.

- » Slide out forward curb fan for easy maintenance and replacement.
- » Ball bearing Direct-Drive EEM motor removes the need for belts, sheaves, bearings and lubrication.
- » High-static drive options for application with high airflow/ static requirements.
- » Each fan assembly is dynamically trim balanced at the factory before shipment for quick start-up and efficient operation.
- » Motor equipped with thermal overload to provide protection and lasting operation.

### Coils

The indoor coil section is installed in a draw through configuration to provide better dehumidification.

These coils are constructed with seamless copper tubes, mechanically bonded into aluminum plate-type fins with full drawn collars to completely cover the tubes for high operating efficiencies.



## Features and Benefits

---

- » Microchannel heat exchanger technology on all condenser coils for improved performance and reduced refrigerant load.
- » Coils are factory pressure tested to ensure pressure and leak integrity.

### Controls and Wiring

Packaged rooftop units come equipped with a well-organized, large, easy to use weatherproof internal control box with easy access, for a better user experience.

- » Units are factory-wired with color-coded wires and complete 24-volt Electromechanical controls package.
- » Units include single-point power entry as standard and also available with electric heat kits if selected.
- » Terminal strips are provided as standard for easy installation and low voltage power wiring.

### Filtration

Unit provides a draw-through filter section as standard for better air quality and long lasting component maintenance.

- » Filters installed on the units are standard off the shelf sizes for easy replacement.
- » Tool-less filter access for easy and fast filter replacement and service.

### Heating Section

Wide ranging of electric heat selections effectively handle most comfort heating demand from morning warm-up control to full heat.

### Electric Heat

ETL approved electric heat is factory assembled, installed and tested.

- » Heating control is fully integrated into the unit's control system for quick start-up and reliable control.
- » Durable low watt density, nickel chromium elements provide longer life (compared to units without)..

- » Fuses are provided in each branch circuit to a maximum of 48 Amps per NEC requirements.
- » Single-point power connection reduces installation cost.
- » For operational safeties electric heat includes automatic reset, and high temperature limit safety protection and an airflow safety switch to prevent electric heat operation in the event of no airflow.

### Electrical

Units are completely wired and tested at the factory to provide faster commissioning and start-up.

- » Wiring complies with NEC requirements and all applicable UL standards.
- » Units are factory-wired with color-coded wires and complete 24-volt electromechanical controls package.
- » A 115 V GFI convenience receptacle requiring independent power supply for the receptacle is optional.
- » An optional unit powered 20 amp 115 V convenience receptacle, complete with factory mounted transformer, disconnect switch, and primary and secondary overload protection, eliminates the need to pull a separate 115 V power source.
- » Unit includes knockouts in the bottom of the main control panels for field wiring entrance.
- » A single-point power connection with power block is standard and a terminal strip is provided for connecting low voltage control wiring.
- » For better serviceability an optional non-fused disconnect switch can be installed inside the control panel and operated by an externally mounted handle to disconnect the electrical power at the unit



### Applications

Daikin Rooftop units are intended for comfort cooling applications in normal heating, ventilating, and air conditioning. Consult your local Daikin sales representative for applications involving operations at high ambient temperatures, high altitudes, non-cataloged voltages, or for job-specific unit selections that fall outside of the range of the catalog tables.

For proper operation, units should be rigged in accordance with instructions stated on the installation manual. Fire dampers, if required, must be installed in the ductwork according to local and/or state codes. No space is allowed for these dampers in the unit.

Follow factory check, test and start procedures explicitly to achieve satisfactory start-up and operation.

Most rooftop applications take advantage of the significant energy savings provided with economizer operation. When an economizer system is used, mechanical refrigeration is typically not required below an ambient temperature of 50°F.

### Serviceability

Daikin packaged rooftop units are built with serviceability in mind, designed to make future maintenance and service on the unit easy and accessible.

- » Our packaged rooftop units offer a slide out blower to facilitate the access and removal of the fan.
- » Filter panels offer tool-less access for easy maintenance.
- » Independent compressor outside of the air bypass to eliminate component blockage and provide easy access.
- » Label Field Connections are color-coded to identify point to point component connections.
- » All 7.5-10 ton units are designed for convertible airflow orientation to serve downflow or horizontal applications. Every unit ships prepared to convert to horizontal orientation in the field if required.





Model	DFH0903D000001S	DFH0904D000001S	DFH0907D000001S
<b>COOLING CAPACITY</b>			
Total BTU/H	86,000	86,000	86,000
IEER / EER	14.1 / 11	14.1 / 11	14.1 / 11
AHRI Reference #	210446541	210446541	210446541
<b>EVAPORATOR MOTOR / RTPF (ROUND TUBE PLATE FIN)</b>			
Motor Type	Direct Drive	Direct Drive	Direct Drive
External Static Pressure (ESP)	Standard	Standard	Standard
Wheel Dia. X Width	15x12	15x12	15x12
Indoor Nominal CFM	3000	3000	3000
RPM	300-1600	300-1600	300-1600
Indoor Horsepower	2.4	2.4	2.4
Filter Size (in)	20 X 25 X 2 (2) 25 X 25 X 2 (2)	20 X 25 X 2 (2) 25 X 25 X 2 (2)	20 X 25 X 2 (2) 25 X 25 X 2 (2)
Drain Size (NPT)	3/4	3/4	3/4
R-410A Refrigerant Charge (oz.)	161/161	161/161	161/161
Evaporator Coil Face Area (ft <sup>2</sup> )	15	15	15
Rows Deep/ Fins per Inch	3 / 16	3 / 16	3 / 16
<b>CONDENSER FAN / MCHX (MICROCHANNEL HEAT EXCHANGER)</b>			
Quantity of Condenser Fan Motors	2	2	2
RPM (High/Low stage)	1130	1115	1075
Outdoor Horsepower	1/2	1/2	1/2
Fan Diameter/ # Fan Blades	22 / 3	22 / 3	22 / 3
Face Area (ft <sup>2</sup> )	31.1	31.1	31.1
Rows Deep / Fins per Inch	2/16	2/16	2/16
<b>COMPRESSOR</b>			
Quantity / Type / Stages Per Compression	2/ Scroll / 1	2/ Scroll / 1	2/ Scroll / 1
Compressor RLA / LRA	13.1/83.1	6.1/41	4.4/33
<b>ELECTRICAL DATA</b>			
Voltage-Phase-Frequency	208/230-3-60	460-3-60	575-3-60
Indoor Blower FLA	8	5.4	4.0
Max External Static (In. W.C.)	0.8	0.8	0.8
Outdoor Fan FLA	2.7	1.4	1
Min. Circuit Ampacity <sup>1</sup>	43.0/43.0	21.9	15.8
Max. Overcurrent Protection (A) <sup>2</sup>	50/50	25	20
Power Supply Conduit Hole Dia. (in)	1.375	1.375	1.375
Low-Voltage Conduit Hole Dia. (in)	0.5	0.5	0.5
<b>OPERATING WEIGHT (LBS.)</b>			
Operating Weight (lbs)	1120	1120	1120
<b>SHIPPING WEIGHT (LBS.)</b>			
Ship Weight (lbs)	1200	1200	1200

<sup>1</sup> Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

<sup>2</sup> May use fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

Model	DFH1023D000001S	DFH1024D000001S	DFH1027D000001S
<b>COOLING CAPACITY</b>			
Total BTU/H	100,000	100,000	100,000
IEER / EER	14.1 / 11	14.1 / 11	14.1 / 11
AHRI Reference #	210446542	210446542	210446542
<b>EVAPORATOR MOTOR / RTPF (ROUND TUBE PLATE FIN)</b>			
Motor Type	Direct Drive	Direct Drive	Direct Drive
External Static Pressure (ESP)	Standard	Standard	Standard
Wheel Dia. X Width	15x12	15x12	15x12
Indoor Nominal CFM	3000	3000	3000
RPM	300-1600	300-1600	300-1600
Indoor Horsepower	2.4	2.4	2.4
Filter Size (in)	20 X 25 X 2 (2) 25 X 25 X 2 (2)	20 X 25 X 2 (2) 25 X 25 X 2 (2)	20 X 25 X 2 (2) 25 X 25 X 2 (2)
Drain Size (NPT)	3/4	3/4	3/4
R-410A Refrigerant Charge (oz.)	144/146	144/146	144/146
Evaporator Coil Face Area (ft <sup>2</sup> )	15	15	15
Rows Deep/ Fins per Inch	3 / 16	3 / 16	3 / 16
<b>CONDENSER FAN / MCHX (MICROCHANNEL HEAT EXCHANGER)</b>			
Quantity of Condenser Fan Motors	2	2	2
RPM (High/Low stage)	1122	1050	1075
Outdoor Horsepower	1/3	1/3	1/3
Fan Diameter/ # Fan Blades	22 / 3	22 / 3	22 / 3
Face Area (ft <sup>2</sup> )	31.1	31.1	31.1
Rows Deep / Fins per Inch	2/16	2/16	2/16
<b>COMPRESSOR</b>			
Quantity / Type / Stages Per Compression	2/ Scroll / 1	2/ Scroll / 1	2/ Scroll / 1
Compressor RLA / LRA	15.9/110	7.1/52	5.1/39.5
<b>ELECTRICAL DATA</b>			
Voltage-Phase-Frequency	208/230-3-60	460-3-60	575-3-60
Indoor Blower FLA	8	5.4	4.0
Max External Static (In. W.C.)	0.8	0.8	0.8
Outdoor Fan FLA	2	0.85	0.67
Min. Circuit Ampacity <sup>1</sup>	47.8/47.8	23	16.9
Max. Overcurrent Protection (A) <sup>2</sup>	60/60	30	20
Power Supply Conduit Hole Dia. (in)	1.375	1.375	1.375
Low-Voltage Conduit Hole Dia. (in)	0.5	0.5	0.5
<b>OPERATING WEIGHT (LBS.)</b>			
Operating Weight (lbs)	1134	1134	1134
<b>SHIPPING WEIGHT (LBS.)</b>			
Ship Weight (lbs)	1214	1214	1214

<sup>1</sup> Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

<sup>2</sup> May use fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

Model	DFH1203D000001S	DFH1204D000001S	DFH1207D000001S
<b>COOLING CAPACITY</b>			
Total BTU/H	116,000	116,000	116,000
IEER / EER	14.1 / 11	14.1 / 11	14.1 / 11
AHRI Reference #	210446543	210446543	210446543
<b>EVAPORATOR MOTOR / RTPF (ROUND TUBE PLATE FIN)</b>			
Motor Type	Direct Drive	Direct Drive	Direct Drive
External Static Pressure (ESP)	Standard	Standard	Standard
Wheel Dia. X Width	15x15	15x15	15x15
Indoor Nominal CFM	3850	3850	3850
RPM	300-1600	300-1600	300-1600
Indoor Horsepower	3.5	3.5	3.5
Filter Size (in)	20 X 25 X 2 (2) 25 X 25 X 2 (2)	20 X 25 X 2 (2) 25 X 25 X 2 (2)	20 X 25 X 2 (2) 25 X 25 X 2 (2)
Drain Size (NPT)	3/4	3/4	3/4
R-410A Refrigerant Charge (oz.)	154/154	154/154	154/154
Evaporator Coil Face Area (ft <sup>2</sup> )	15	15	15
Rows Deep/ Fins per Inch	3 / 16	3 / 16	3 / 16
<b>CONDENSER FAN / MCHX (MICROCHANNEL HEAT EXCHANGER)</b>			
Quantity of Condenser Fan Motors	1130	1115	1075
RPM (High/Low stage)	1/2	1/2	1/2
Outdoor Horsepower	22 / 3	22 / 3	22 / 3
Fan Diameter/ # Fan Blades	33.3	33.3	33.3
Face Area (ft <sup>2</sup> )	2/16	2/16	2/16
Rows Deep / Fins per Inch	2/16	2/16	2/16
<b>COMPRESSOR</b>			
Quantity / Type / Stages Per Compression	2/ Scroll / 1	2/ Scroll / 1	2/ Scroll / 1
Compressor RLA / LRA	15.6/110	7.8 / 52.0	5.8 / 38.9
<b>ELECTRICAL DATA</b>			
Voltage-Phase-Frequency	208/230-3-60	460-3-60	575-3-60
Indoor Blower FLA	10.9	7.2	5.0
Max External Static (In. W.C.)	0.8	0.8	0.8
Outdoor Fan FLA	2.7	1.4	1
Min. Circuit Ampacity <sup>1</sup>	51.5/51.5	27.5	20.1
Max. Overcurrent Protection (A) <sup>2</sup>	60/60	35	25
Power Supply Conduit Hole Dia. (in)	1.375	1.375	1.375
Low-Voltage Conduit Hole Dia. (in)	0.5	0.5	0.5
<b>OPERATING WEIGHT (LBS.)</b>			
Operating Weight (lbs)	1154	1154	1154
<b>SHIPPING WEIGHT (LBS.)</b>			
Ship Weight (lbs)	1234	1234	1234

<sup>1</sup> Wire size should be determined in accordance with National Electrical Codes. Extensive wire runs will require larger wire sizes.

<sup>2</sup> May use fuses or HACR-type circuit breakers of the same size as noted.

Note: Always check the S&R plate for electrical data on the unit being installed.

## Sound Data

STATIC PRESSURE	7.5 TON SOUND (DB) AT 60 HZ										
	Indoor CFM	Componet	A-Weighted	63	125	250	500	1000	2000	4000	8000
0.8	3,000	Discharge	76.6	95.9	78.9	68.0	74.3	69.7	67.0	66.6	60.0
		Inlet	67.4	91.6	76.3	65.2	61.6	59.0	53.2	52.6	46.8
1.4		Discharge	78.8	94.8	83.0	71.0	72.6	75.3	70.0	69.1	63.0
		Inlet	69.8	91.1	80.3	67.5	63.9	62.6	56.6	55.9	50.8
2.0		Discharge	82.8	99.9	91.3	76.7	77.0	77.6	74.5	72.2	66.9
		Inlet	72.9	93.3	84.7	71.8	66.5	64.6	59.6	58.8	54.1
N/A	N/A	Outdoor	86.8	95.4	85.3	86.8	83.3	81.7	79.8	72.2	66.9

STATIC PRESSURE	8.5 TON SOUND (DB) AT 60 HZ										
	Indoor CFM	Componet	A-Weighted	63	125	250	500	1000	2000	4000	8000
0.8	3,400	Discharge	78.3	97.3	80.8	70.2	74.2	72.6	69.4	69.3	63.7
		Inlet	68.5	90.3	77.7	66.0	62.7	61.7	55.2	55.0	49.8
1.4		Discharge	80.0	94.5	83.4	71.8	73.7	76.2	71.5	71.0	65.9
		Inlet	69.6	89.9	78.1	68.2	64.7	63.9	57.5	57.4	52.7
2.0		Discharge	82.7	98.5	89.3	76.3	77.0	78.3	74.2	72.7	67.9
		Inlet	73.3	92.8	84.7	72.4	67.5	65.7	60.7	60.0	55.6
N/A	N/A	Outdoor	83.7	93.2	89.1	83.5	80.3	78.7	74.5	69.8	64.7

STATIC PRESSURE	10 TON SOUND (DB) AT 60 HZ										
	Indoor CFM	Componet	A-Weighted	63	125	250	500	1000	2000	4000	8000
0.8	4,000	Discharge	75.8	91.2	83.6	73.3	71.6	70.1	66.8	64.9	58.6
		Inlet	69.6	85.5	79.8	73.2	64.2	60.8	54.7	52.8	46.6
1.4		Discharge	80.1	96.1	87.6	76.7	74.6	75.1	71.4	69.3	63.6
		Inlet	71.3	88.9	81.9	72.6	65.7	63.6	58.4	57.0	50.8
2.0		Discharge	81.6	98.1	89.4	80.8	76.2	75.9	73.3	70.8	65.0
		Inlet	73.9	91.2	84.6	76.8	67.2	65.6	60.7	59.7	53.9
N/A	N/A	Outdoor	86.8	95.4	85.3	86.8	83.3	81.7	79.8	72.2	66.9

<sup>1</sup> Outdoor sound data is measured in accordance with AHRI standard 270

<sup>2</sup> Discharge and Inlet sound data was measured in accordance with AHRI standard 260.

<sup>3</sup> Measurements are expressed in terms of sound power. Do not compare these values to sound pressure values because sound pressure depends on specific environment factors which normally do not match individual applications. Sound power values are independent of the environment and therefore more accurate.

<sup>4</sup> A-weighted sound ratings filter out high and very low frequencies, to better approximate the response of "average" human ear. A-weighted measurements for Daikin units are taken in accordance with AHRI standards 260 and 270.

## AHRI Ratings

MODEL	CAPACITY	EER	IEER	47 Capacity	47 COP	17 Capacity	17 COP
DFH0903D	86,000	11.0	14.1	85,000	3.4	51,000	2.25
DFH0904D	86,000	11.0	14.1	85,000	3.4	51,000	2.25
DFH0907D	86,000	11.0	14.1	85,000	3.4	51,000	2.25
DFH1023D	100,000	11.0	14.1	100,000	3.4	61,000	2.25
DFH1024D	100,000	11.0	14.1	100,000	3.4	61,000	2.25
DFH1027D	100,000	11.0	14.1	100,000	3.4	61,000	2.25
DFH1203D	116,000	11.0	14.1	116,000	3.4	65,000	2.25
DFH1204D	116,000	11.0	14.1	116,000	3.4	65,000	2.25
DFH1207D	116,000	11.0	14.1	116,000	3.4	65,000	2.25

## Coil Dimensions

Tons	Indoor			Outdoor		
	Fin height in.	Fin length in.	Area (Ft^2)	Fin height in.	Fin length in.	Area (Ft^2)
7.5	41.6	51.8	15.0	48.5	46.1	31.1
8.5	41.6	51.8	15.0	48.5	46.1	31.1
10	41.6	51.8	15.0	48.5	49.5	33.3

IDB		Outdoor Ambient Temperature																																			
		65						75						85						95						105						115					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
	Airflow	Entering Indoor Wet Bulb Temperature																																			
	ID WB	Entering Indoor Wet Bulb Temperature																																			
70	2625	MBh	87.5	88.7	91.3	-	86.7	87.9	90.6	-	84.4	85.7	88.3	-	80.5	81.7	84.3	-	75.7	76.9	79.5	-	71.3	72.5	75.2	-	71.3	72.5	75.2	-							
		S/T	0.70	0.58	0.41	-	0.71	0.60	0.42	-	0.74	0.61	0.43	-	0.76	0.63	0.44	-	0.77	0.66	0.45	-	0.81	0.66	0.46	-	0.81	0.66	0.46	-							
		ΔT	19.40	17.61	14.26	-	19.35	17.56	14.21	-	19.61	17.81	14.46	-	19.34	17.54	14.19	-	19.10	17.30	13.95	-	20.22	18.42	15.07	-	20.22	18.42	15.07	-							
		Hi PR	243	244	246	-	281	282	284	-	321	322	324	-	365	366	367	-	411	412	414	-	461	462	464	-	461	462	464	-							
		Lo PR	121	123	126	-	129	130	133	-	135	137	140	-	141	142	145	-	146	148	151	-	153	154	157	-	153	154	157	-							
		MBh	88.6	89.9	92.5	-	87.9	89.1	91.7	-	85.6	86.8	89.4	-	81.6	82.9	85.5	-	76.8	78.1	80.7	-	72.5	73.7	76.3	-	72.5	73.7	76.3	-							
		S/T	0.72	0.60	0.42	-	0.73	0.61	0.43	-	0.76	0.63	0.45	-	0.78	0.65	0.46	-	0.80	0.67	0.47	-	0.82	0.69	0.48	-	0.82	0.69	0.48	-							
		ΔT	18.32	16.52	13.17	-	18.27	16.48	13.12	-	18.52	16.73	13.38	-	18.25	16.46	13.11	-	18.01	16.22	12.87	-	19.14	17.34	13.99	-	19.14	17.34	13.99	-							
		Hi PR	245	246	248	-	283	284	286	-	323	324	326	-	367	368	369	-	413	414	416	-	463	464	466	-	463	464	466	-							
		Lo PR	123	125	128	-	131	132	135	-	137	139	142	-	143	144	147	-	148	149	152	-	155	156	159	-	155	156	159	-							
75	3375	MBh	90.0	91.3	93.9	-	89.2	90.5	93.1	-	87.0	88.2	90.8	-	83.0	84.3	86.9	-	78.2	79.5	82.1	-	73.8	75.1	77.7	-	73.8	75.1	77.7	-							
		S/T	0.73	0.62	0.43	-	0.76	0.63	0.44	-	0.78	0.65	0.46	-	0.80	0.67	0.47	-	0.82	0.69	0.49	-	0.86	0.72	0.50	-	0.86	0.72	0.50	-							
		ΔT	17.41	15.61	12.26	-	17.36	15.56	12.21	-	17.61	15.81	12.46	-	17.34	15.54	12.19	-	17.10	15.30	11.95	-	18.22	16.43	13.08	-	18.22	16.43	13.08	-							
		Hi PR	247	248	250	-	285	286	288	-	325	326	328	-	369	370	371	-	415	416	418	-	465	466	468	-	465	466	468	-							
		Lo PR	125	127	130	-	133	134	137	-	139	141	144	-	145	146	149	-	150	151	154	-	157	158	161	-	157	158	161	-							
		MBh	87.5	88.8	91.4	95.4	86.8	88.0	90.6	94.6	84.5	85.7	88.3	92.3	80.5	81.8	84.4	88.4	75.7	77.0	79.6	83.6	71.4	72.6	75.2	79.2	71.4	72.6	75.2	79.2							
		S/T	0.80	0.69	0.53	0.36	0.83	0.74	0.53	0.41	0.83	0.74	0.54	0.38	0.85	0.75	0.56	0.42	0.88	0.80	0.58	0.45	0.89	0.81	0.61	0.46	0.89	0.81	0.61	0.46							
		ΔT	23.35	21.55	18.20	14.7	23.30	21.50	18.15	14.7	23.55	21.76	18.41	14.9	23.28	21.49	18.14	14.7	23.04	21.25	17.90	14.4	24.16	22.37	19.02	15.5	24.16	22.37	19.02	15.5							
		Hi PR	243	244	246	250	281	282	284	288	322	323	324	328	365	366	367	372	411	412	414	418	461	462	464	468	461	462	464	468							
		Lo PR	121	123	126	131	129	130	133	139	135	137	140	145	141	142	145	151	146	148	151	156	153	154	157	163	153	154	157	163							
	MBh	88.7	89.9	92.5	96.5	87.9	89.1	91.8	95.8	85.6	86.9	89.5	93.5	81.7	82.9	85.5	89.5	76.9	78.1	80.7	84.7	72.5	73.7	76.4	80.3	72.5	73.7	76.4	80.3								
	S/T	0.82	0.72	0.56	0.41	0.84	0.75	0.56	0.42	0.85	0.76	0.57	0.43	0.87	0.78	0.59	0.46	0.91	0.82	0.61	0.47	0.92	0.83	0.62	0.47	0.92	0.83	0.62	0.47								
	ΔT	22.26	20.47	17.12	13.6	22.22	20.42	17.07	13.6	22.47	20.67	17.32	13.9	22.20	20.40	17.05	13.6	21.96	20.16	16.81	13.3	23.08	21.29	17.94	14.5	23.08	21.29	17.94	14.5								
	Hi PR	245	246	248	252	283	284	286	290	324	325	326	331	367	368	370	374	413	414	416	420	463	464	466	470	463	464	466	470								
	Lo PR	123	125	128	133	131	132	135	140	137	139	142	147	143	144	147	152	148	149	153	158	155	156	159	164	155	156	159	164								
	MBh	90.1	91.3	93.9	97.9	89.3	90.5	93.1	97.1	87.0	88.2	90.9	94.8	83.1	84.3	86.9	90.9	78.3	79.5	82.1	86.1	73.9	75.1	77.7	81.7	73.9	75.1	77.7	81.7								
	S/T	0.84	0.74	0.58	0.44	0.84	0.77	0.58	0.45	0.87	0.73	0.61	0.47	0.89	0.80	0.62	0.49	0.93	0.85	0.63	0.51	0.95	0.85	0.65	0.49	0.95	0.85	0.65	0.49								
	ΔT	21.35	19.56	16.21	12.7	21.30	19.51	16.16	12.7	21.55	19.76	16.41	12.9	21.28	19.49	16.14	12.7	21.04	19.25	15.90	12.4	22.17	20.37	17.02	13.6	22.17	20.37	17.02	13.6								
	Hi PR	247	248	250	254	285	286	288	292	326	327	328	333	369	370	372	376	415	416	418	422	465	466	468	472	465	466	468	472								
	Lo PR	125	127	130	135	133	134	137	142	139	141	144	149	145	146	149	154	150	151	155	160	157	158	161	166	157	158	161	166								

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction access fittings.  
 Design Subcooling, 16 - 19 °F @ the liquid access fitting connection ARI95 test conditions. Design Superheat 8 - 12°F @ the compressor suction access fitting connection.

Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps: Unit amps (comp.+ evaporator + condenser fan motors)  
 Amps: Unit amps (comp.+ evaporator + condenser fan motors)

IDB		Outdoor Ambient Temperature																																			
		65						75						85						95						105						115					
		Airflow	ID	WB	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71									
80		2625	MBh	88.0	89.2	91.8	95.8	87.2	88.5	91.1	95.1	84.9	86.2	88.8	92.8	81.0	82.2	84.9	88.8	76.2	77.4	80.0	84.0	71.8	73.0	75.7	79.7										
			S/T	0.89	0.83	0.64	0.47	0.89	0.84	0.68	0.50	0.92	0.86	0.70	0.54	0.94	0.89	0.71	0.52	0.98	0.92	0.75	0.57	0.98	0.92	0.76	0.59										
		ΔT	27.32	25.53	22.18	18.7	27.27	25.48	22.13	18.7	27.52	25.73	22.38	18.9	27.25	25.46	22.11	18.6	27.01	25.22	21.87	18.4	28.14	26.34	22.99	19.5											
		Hi PR	243	245	246	250	282	283	285	289	322	323	325	329	365	366	368	372	412	413	415	419	462	463	464	469											
		Lo PR	122	123	127	132	129	131	134	139	136	137	140	146	141	143	146	151	147	148	151	156	153	155	158	163											
		MBh	89.1	90.4	93.0	97.0	88.4	89.6	92.2	96.2	86.1	87.3	89.9	93.9	82.1	83.4	86.0	90.0	77.3	78.6	81.2	85.2	73.0	74.2	76.8	80.8											
		S/T	0.87	0.81	0.66	0.50	0.91	0.84	0.70	0.53	0.93	0.86	0.71	0.56	0.96	0.90	0.75	0.57	1.00	0.93	0.76	0.58	1.00	0.94	0.78	0.59											
		ΔT	26.24	24.44	21.09	17.6	26.19	24.39	21.04	17.6	26.44	24.64	21.29	17.8	26.17	24.37	21.02	17.6	25.93	24.13	20.78	17.3	27.05	25.26	21.91	18.4											
		Hi PR	246	247	248	252.5	284	285	287	291	324	325	327	331	367	368	370	374	414	415	417	421	464	465	466	471											
		Lo PR	124	125	128	134	131	133	136	141	138	139	142	147	143	145	148	153	148	150	153	158	155	157	160	165											
MBh	90.5	91.8	94.4	98.4	89.7	91.0	93.6	97.6	87.5	88.7	91.3	95.3	83.5	84.8	87.4	91.4	78.7	80.0	82.6	86.6	74.3	75.6	78.2	82.2													
S/T	0.92	0.86	0.69	0.53	0.95	0.89	0.72	0.52	0.99	0.89	0.75	0.59	1.00	0.94	0.77	0.61	1.00	0.98	0.80	0.63	1.00	1.00	0.81	0.68													
ΔT	25.32	23.53	20.18	16.7	25.27	23.48	20.13	16.7	25.53	23.73	20.38	16.9	25.26	23.46	20.11	16.6	25.02	23.22	19.87	16.4	26.14	24.35	21.00	17.5													
Hi PR	248	249	250	255	286	287	289	293	326	327	329	333	369	370	372	376	416	417	419	423	466	467	468	473													
Lo PR	126	127	130	136	133	135	138	143	140	141	144	149	145	147	150	155	150	152	155	160	157	159	162	167													
85		2625	MBh	89.5	90.7	93.3	97.3	88.7	89.9	92.5	96.5	86.4	87.6	90.3	94.2	82.5	83.7	86.3	90.3	77.7	78.9	81.5	85.5	73.3	74.5	77.1	81.1										
			S/T	0.91	0.88	0.80	0.64	0.95	0.90	0.81	0.70	0.96	0.92	0.84	0.71	1.00	0.96	0.86	0.71	1.00	1.00	0.91	0.72	1.00	1.00	0.91	0.74										
		ΔT	30.84	29.05	25.70	22.2	30.79	29.00	25.65	22.2	31.05	29.25	25.90	22.4	30.78	28.98	25.63	22.2	30.54	28.74	25.39	21.9	31.66	29.87	26.51	23.0											
		Hi PR	245	246	247	252	283	284	286	290	323	324	326	330	366	367	369	373	413	414	416	420	463	464	465	470											
		Lo PR	124	125	128	134	131	133	136	141	138	139	142	147	143	145	148	153	149	150	153	158	155	157	160	165											
		MBh	90.6	91.9	94.5	98.5	89.8	91.1	93.7	97.7	87.6	88.8	91.4	95.4	83.6	84.9	87.5	91.5	78.8	80.1	82.7	86.7	74.4	75.7	78.3	82.3											
		S/T	0.94	0.88	0.81	0.68	0.96	0.92	0.83	0.71	0.97	0.94	0.85	0.72	1.00	0.97	0.88	0.73	1.00	1.00	0.92	0.74	1.00	1.00	0.92	0.77											
		ΔT	29.76	27.96	24.61	21.1	29.71	27.92	24.57	21.1	29.96	28.17	24.82	21.3	29.69	27.90	24.55	21.1	29.45	27.66	24.31	20.8	30.58	28.78	25.43	22.0											
		Hi PR	247	248	249	254	285	286	288	292	325	326	328	332	368	369	371	375	415	416	418	422	465	466	467	472											
		Lo PR	126	127	130	135	133	134	138	143	139	141	144	149	145	146	150	155	150	152	155	160	157	159	162	167											
MBh	92.0	93.2	95.9	99.8	91.2	92.5	95.1	99.1	88.9	90.2	92.8	96.8	85.0	86.2	88.9	92.8	80.2	81.4	84.1	88.0	75.8	77.1	79.7	83.7													
S/T	0.96	0.92	0.83	0.70	1.00	0.96	0.87	0.72	1.00	1.00	0.90	0.73	1.00	1.00	0.92	0.78	1.00	1.00	0.97	0.80	1.00	1.00	0.98	0.82													
ΔT	28.85	27.05	23.70	20.2	28.80	27.00	23.65	20.2	29.05	27.26	23.90	20.4	28.78	26.98	23.63	20.2	28.54	26.74	23.39	19.9	29.66	27.87	24.52	21.0													
Hi PR	249	250	251	256	287	288	290	294	327	328	330	334	370	371	373	377	417	418	420	424	467	468	469	474													
Lo PR	128	129	132	137	135	136	140	145	141	143	146	151	147	148	151	157	152	154	157	162	159	160	164	169													

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction access fittings.  
 Design Subcooling, 16 - 19 °F @ the liquid access fitting connection ARI 95 test conditions. Design Superheat 8 - 12°F @ the compressor suction access fitting connection.

Shaded area reflects ACCA (TVA) conditions

kW = Total system power  
 Amps: Unit amps (comp. + evaporator + condenser fan motors)

IDB		Outdoor Ambient Temperature																																			
		65						75						85						95						105						115					
		Airflow	ID	WB	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71					
70	2625	MBh	101.7	103.2	106.2	-	100.8	102.3	105.3	-	98.2	99.6	102.6	-	93.6	95.0	98.1	-	88.0	89.5	92.5	-	82.9	84.4	87.4	-	82.9	84.4	87.4	-	82.9	84.4	87.4				
		S/T	0.70	0.58	0.41	-	0.72	0.61	0.41	-	0.74	0.61	0.42	-	0.76	0.63	0.44	-	0.79	0.66	0.45	-	0.80	0.67	0.46	-	0.80	0.67	0.46	-	0.80	0.67	0.46				
		ΔT	20.18	18.32	14.83	-	20.13	18.26	14.78	-	20.39	18.53	15.04	-	20.11	18.24	14.76	-	19.86	18.00	14.51	-	21.03	19.16	15.68	-	21.03	19.16	15.68	-	21.03	19.16	15.68				
		Hi PR	258	259	261	-	299	300	302	-	342	343	345	-	388	389	391	-	437	439	440	-	490	491	493	-	490	491	493	-	490	491	493				
	Lo PR	121	122	126	-	128	130	133	-	135	136	139	-	140	142	145	-	146	147	150	-	152	154	157	-	152	154	157	-	152	154	157					
	MBh	103.1	104.5	107.6	-	102.2	103.6	106.6	-	99.5	100.9	104.0	-	94.9	96.4	99.4	-	89.4	90.8	93.8	-	84.3	85.7	88.7	-	84.3	85.7	88.7	-	84.3	85.7	88.7					
	S/T	0.72	0.61	0.42	-	0.74	0.62	0.45	-	0.77	0.65	0.45	-	0.80	0.67	0.47	-	0.83	0.68	0.49	-	0.82	0.69	0.48	-	0.82	0.69	0.48	-	0.82	0.69	0.48					
	ΔT	19.05	17.19	13.70	-	19.00	17.14	13.65	-	19.27	17.40	13.91	-	18.98	17.12	13.63	-	18.73	16.87	13.38	-	19.90	18.04	14.55	-	19.90	18.04	14.55	-	19.90	18.04	14.55					
	Hi PR	261	262	263	-	301	302	304	-	344	345	347	-	390	391	393	-	440	441	443	-	493	494	495	-	493	494	495	-	493	494	495					
	Lo PR	123	124	127	-	130	132	135	-	137	138	141	-	142	144	147	-	147	149	152	-	154	156	159	-	154	156	159	-	154	156	159					
	MBh	104.7	106.1	109.2	-	103.8	105.2	108.2	-	101.1	102.5	105.6	-	96.5	98.0	101.0	-	91.0	92.4	95.4	-	85.9	87.3	90.3	-	85.9	87.3	90.3	-	85.9	87.3	90.3					
	S/T	0.74	0.63	0.44	-	0.76	0.64	0.47	-	0.79	0.67	0.47	-	0.82	0.69	0.49	-	0.85	0.70	0.51	-	0.85	0.72	0.52	-	0.85	0.72	0.52	-	0.85	0.72	0.52					
ΔT	18.10	16.24	12.75	-	18.05	16.19	12.70	-	18.32	16.45	12.96	-	18.03	16.17	12.68	-	17.79	15.92	12.43	-	18.95	17.09	13.60	-	18.95	17.09	13.60	-	18.95	17.09	13.60						
Hi PR	263	264	266	-	303	305	306	-	346	347	349	-	392	393	395	-	442	443	445	-	495	496	498	-	495	496	498	-	495	496	498						
Lo PR	125	126	129	-	132	134	137	-	139	140	143	-	144	146	149	-	149	151	154	-	156	158	161	-	156	158	161	-	156	158	161						
75	2625	MBh	101.8	103.2	106.3	110.9	100.9	102.3	105.4	110.0	98.2	99.7	102.7	107.3	93.7	95.1	98.1	102.8	88.1	89.5	92.5	97.2	83.0	84.4	87.5	92.1	83.0	84.4	87.5	92.1	83.0	84.4	87.5	92.1			
		S/T	0.78	0.68	0.52	0.35	0.83	0.74	0.55	0.37	0.84	0.71	0.56	0.38	0.86	0.73	0.57	0.42	0.89	0.75	0.59	0.44	0.91	0.77	0.63	0.46	0.91	0.77	0.63	0.46	0.91	0.77	0.63	0.46			
		ΔT	24.29	22.42	18.93	15.3	24.23	22.37	18.88	15.3	24.50	22.63	19.15	15.5	24.22	22.35	18.86	15.3	23.97	22.10	18.61	15.0	25.13	23.27	19.78	16.2	25.13	23.27	19.78	16.2	25.13	23.27	19.78	16.2			
		Hi PR	259	260	262	266.0	299	300	302	306.8	342	343	345	349.5	388	389	391	395.5	438	439	441	445.1	491	492	493	498.0	491	492	493	498.0	491	492	493	498.0			
	Lo PR	121	123	126	130.8	128	130	133	138.1	135	136	139	144.6	140	142	145	150.0	146	147	150	155.4	152	154	157	162.1	152	154	157	162.1	152	154	157	162.1				
	MBh	103.1	104.6	107.6	112.3	102.2	103.7	106.7	111.3	99.6	101.0	104.0	108.7	95.0	96.4	99.5	104.1	89.4	90.8	93.9	98.5	84.3	85.7	88.8	93.4	84.3	85.7	88.8	93.4	84.3	85.7	88.8	93.4				
	S/T	0.82	0.71	0.56	0.37	0.85	0.72	0.58	0.39	0.86	0.73	0.59	0.40	0.88	0.74	0.60	0.44	0.91	0.77	0.61	0.45	0.94	0.81	0.64	0.47	0.94	0.81	0.64	0.47	0.94	0.81	0.64	0.47				
	ΔT	23.16	21.29	17.81	14.2	23.11	21.24	17.76	14.1	23.37	21.50	18.02	14.4	23.09	21.22	17.74	14.1	22.84	20.97	17.49	13.9	24.01	22.14	18.66	15.0	24.01	22.14	18.66	15.0	24.01	22.14	18.66	15.0				
	Hi PR	261	262	264	268	302	303	304	309	344	345	347	352	390	391	393	398	440	441	443	447	493	494	496	500	493	494	496	500	493	494	496	500				
	Lo PR	123	124	127	133	130	132	135	140	137	138	141	146	142	144	147	152	147	149	152	157	154	156	159	164	154	156	159	164	154	156	159	164				
	MBh	104.7	106.2	109.2	113.9	103.8	105.3	108.3	112.9	101.2	102.6	105.6	110.3	96.6	98.0	101.1	105.7	91.0	92.5	95.5	100.1	85.9	87.4	90.4	95.0	85.9	87.4	90.4	95.0	85.9	87.4	90.4	95.0				
	S/T	0.84	0.73	0.58	0.40	0.87	0.74	0.61	0.42	0.88	0.75	0.61	0.44	0.90	0.76	0.62	0.46	0.93	0.80	0.64	0.47	0.96	0.83	0.66	0.48	0.96	0.83	0.66	0.48	0.96	0.83	0.66	0.48				
ΔT	22.21	20.34	16.86	13.2	22.16	20.29	16.81	13.2	22.42	20.55	17.07	13.5	22.14	20.27	16.79	13.2	21.89	20.02	16.54	12.9	23.06	21.19	17.71	14.1	23.06	21.19	17.71	14.1	23.06	21.19	17.71	14.1					
Hi PR	263	264	266	270	304	305	307	311	346	348	349	354	392	394	395	400	442	443	445	449	495	496	498	502	495	496	498	502	495	496	498	502					
Lo PR	125	126	129	135	132	134	137	142	139	140	143	148	144	146	149	154	149	151	154	159	156	158	161	166	156	158	161	166	156	158	161	166					

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction access fittings.  
 Design Subcooling, 16 - 19 °F @ the liquid access fitting connection ARI 95 test conditions. Design Superheat 8 - 12 °F @ the compressor suction access fitting connection.

Shaded area reflects ACCA (TVA) conditions

kW = Total system power  
 Amps: Unit amps (comp.+ evaporator + condenser fan motors)  
 Amps: compressor suction access fitting connection.





IDB		Outdoor Ambient Temperature																																			
		65						75						85						95						105						115					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
	Airflow	Entering Indoor Wet Bulb Temperature																																			
	ID WB	Entering Indoor Wet Bulb Temperature																																			
70	MBh	117.9	119.6	123.1	-	116.8	118.5	122.0	-	113.8	115.4	118.9	-	108.4	110.1	113.6	-	102.0	103.6	107.2	-	96.1	97.7	101.2	-												
	S/T	0.69	0.57	0.40	-	0.72	0.55	0.40	-	0.75	0.59	0.40	-	0.78	0.61	0.42	-	0.78	0.63	0.44	-	0.79	0.66	0.49	-												
	ΔT	19.39	17.61	14.28	-	19.34	17.56	14.23	-	19.59	17.81	14.48	-	19.32	17.54	14.21	-	19.09	17.30	13.97	-	20.20	18.42	15.09	-												
	Hi PR	265	266	268	-	307	308	310	-	350	352	353	-	398	399	401	-	448	450	451	-	503	504	506	-												
	Lo PR	118	119	122	-	125	126	129	-	131	132	135	-	136	138	141	-	141	143	146	-	148	149	152	-												
	MBh	119.6	121.2	124.8	-	118.5	120.2	123.7	-	115.4	117.1	120.6	-	110.1	111.8	115.3	-	103.6	105.3	108.8	-	97.7	99.4	102.9	-												
	S/T	0.71	0.58	0.44	-	0.73	0.57	0.44	-	0.74	0.60	0.47	-	0.77	0.62	0.49	-	0.81	0.64	0.51	-	0.82	0.69	0.56	-												
	ΔT	18.20	16.42	13.09	-	18.16	16.37	13.04	-	18.41	16.62	13.29	-	18.14	16.35	13.03	-	17.90	16.12	12.79	-	19.02	17.23	13.90	-												
	Hi PR	267	268	270	-	309	310	312	-	353	354	356	-	400	401	403	-	451	452	454	-	505	506	508	-												
	Lo PR	119	121	124	-	127	128	131	-	133	134	137	-	138	140	143	-	143	145	148	-	150	151	154	-												
75	MBh	121.2	122.9	126.4	-	120.1	121.8	125.3	-	117.1	118.7	122.2	-	111.8	113.4	116.9	-	105.3	106.9	110.5	-	99.4	101.0	104.5	-												
	S/T	0.73	0.60	0.46	-	0.74	0.60	0.47	-	0.76	0.63	0.50	-	0.77	0.65	0.52	-	0.78	0.67	0.54	-	0.83	0.72	0.59	-												
	ΔT	17.40	15.61	12.28	-	17.35	15.57	12.24	-	17.60	15.82	12.49	-	17.33	15.55	12.22	-	17.09	15.31	11.98	-	18.21	16.43	13.10	-												
	Hi PR	269	270	272	-	311	312	314	-	355	356	358	-	402	403	405	-	453	454	456	-	507	508	510	-												
	Lo PR	121	123	126	-	128	130	133	-	135	136	139	-	140	141	144	-	145	146	149	-	152	153	156	-												
	MBh	118.0	119.6	123.2	128.5	116.9	118.6	122.1	127.5	113.8	115.5	119.0	124.4	108.5	110.2	113.7	119.1	102.0	103.7	107.2	112.6	96.1	97.8	101.3	106.7												
	S/T	0.79	0.70	0.50	0.30	0.81	0.72	0.50	0.37	0.81	0.77	0.55	0.39	0.84	0.76	0.55	0.41	0.88	0.77	0.65	0.43	0.89	0.79	0.62	0.48												
	ΔT	23.31	21.53	18.20	14.8	23.26	21.48	18.15	14.7	23.51	21.73	18.40	15.0	23.25	21.46	18.13	14.7	23.01	21.22	17.89	14.4	24.12	22.34	19.01	15.6												
	Hi PR	265	266	268	273	307	308	310	314	351	352	354	358	398	399	401	405	449	450	452	456	503	504	506	511												
	Lo PR	118	119	122	127	125	126	129	134	131	132	135	140	136	138	141	146	141	143	146	151	148	149	152	157												
75	MBh	119.6	121.3	124.8	130.2	118.6	120.2	123.8	129.2	115.5	117.2	120.7	126.1	110.2	111.9	115.4	120.8	103.7	105.4	108.9	114.3	97.8	99.5	103.0	108.4												
	S/T	0.81	0.72	0.56	0.42	0.83	0.75	0.57	0.4	0.83	0.79	0.59	0.45	0.86	0.77	0.61	0.5	0.91	0.82	0.69	0.49	0.93	0.84	0.67	0.54												
	ΔT	22.13	20.34	17.01	13.6	22.08	20.29	16.96	13.5	22.33	20.54	17.21	13.8	22.06	20.28	16.95	13.5	21.82	20.04	16.71	13.3	22.94	21.15	17.82	14.4												
	Hi PR	267	269	270	275	309	310	312	317	353	354	356	361	400	401	403	408	451	452	454	459	505	507	508	513												
	Lo PR	119	121	124	129	127	128	131	136	133	134	137	142	138	140	143	148	143	145	148	153	150	151	154	159												
	MBh	121.3	122.9	126.5	131.8	120.2	121.9	125.4	130.8	117.1	118.8	122.3	127.7	111.8	113.5	117.0	122.4	105.3	107.0	110.5	115.9	99.4	101.1	104.6	110.0												
	S/T	0.83	0.75	0.59	0.40	0.85	0.77	0.61	0.46	0.88	0.86	0.62	0.48	0.91	0.83	0.64	0.50	0.96	0.84	0.70	0.52	0.97	0.86	0.68	0.57												
	ΔT	21.32	19.54	16.21	12.8	21.27	19.49	16.16	12.7	21.52	19.74	16.41	13.0	21.25	19.47	16.14	12.7	21.01	19.23	15.90	12.5	22.13	20.35	17.02	13.6												
	Hi PR	269	271	272	277	311	312	314	319	355	356	358	363	402	403	405	410	453	454	456	461	507	508	510	515												
	Lo PR	121	123	126	131	128	130	133	138	135	136	139	144	140	141	144	149	145	146	149	154	152	153	156	161												

kW = Total system power

Amps: Unit amps (comp.+ evaporator + condenser fan motors)

Design Subcooling, 16 - 19 ° F @ the liquid access fitting connection ARI95 test conditions. Design Superheat 8 - 12 ° F @ the compressor suction access fitting connection.

Shaded area reflects ACCA (TVA) conditions

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction access fittings.

Design Subcooling, 16 - 19 ° F @ the liquid access fitting connection ARI95 test conditions. Design Superheat 8 - 12 ° F @ the compressor suction access fitting connection.

IDB		Outdoor Ambient Temperature																																																	
		65						75						85						95						105						115																			
		Airflow	ID	WB	59	63	67	71	Airflow	ID	WB	59	63	67	71	Airflow	ID	WB	59	63	67	71	Airflow	ID	WB	59	63	67	71	Airflow	ID	WB	59	63	67	71															
Entering Indoor Wet Bulb Temperature																																																			
80	3325	MBh	118.6	120.2	123.8	129.1	117.5	119.2	122.7	128.1	114.4	116.1	119.6	125.0	109.1	110.8	114.3	119.7	102.6	104.3	107.8	113.2	96.7	98.4	101.9	107.3	S/T	0.87	0.79	0.62	0.48	0.90	0.83	0.62	0.49	0.92	0.85	0.65	0.51	0.94	0.87	0.67	0.53	0.97	0.91	0.75	0.55	1.00	0.96	0.74	0.60
		ΔT	27.26	25.48	22.15	18.7	27.21	25.43	22.10	18.6	27.46	25.68	22.35	18.9	27.19	25.41	22.08	18.6	26.96	25.17	21.84	18.4	28.07	26.29	22.96	19.5	Hi PR	265	267	268	273	307	308	310	315	351	352	354	359	398	399	401	406	449	450	452	457	503	505	506	511
	Lo PR	118	120	123	128	125	127	130	135	131	133	136	141	137	138	141	146	142	143	146	151	149	150	153	158	MBh	120.2	121.9	125.4	130.8	119.2	120.9	124.4	129.8	116.1	117.8	121.3	126.7	110.8	112.5	116.0	121.4	104.3	106.0	109.5	114.9	98.4	100.1	103.6	109.0	
	S/T	0.89	0.81	0.68	0.54	0.92	0.85	0.69	0.6	0.94	0.87	0.72	0.57	0.96	0.91	0.77	0.59	0.99	0.94	0.77	0.61	1.00	0.95	0.80	0.66	ΔT	26.07	24.29	20.96	17.5	26.02	24.24	20.91	17.5	26.28	24.49	21.16	17.7	26.01	24.22	20.89	17.4	25.77	23.98	20.66	17.2	26.88	25.10	21.77	18.3	
	Hi PR	268	269	271	276	310	311	313	317	354	355	357	361	401	402	404	408	452	453	455	459	506	507	509	513	Lo PR	120	121	124	129	127	129	132	137	133	135	138	143	139	140	143	148	144	145	148	153	150	152	155	160	
	MBh	121.9	123.5	127.1	132.5	120.8	122.5	126.0	131.4	117.7	119.4	122.9	128.3	112.4	114.1	117.6	123.0	106.0	107.6	111.1	116.5	100.0	101.7	105.2	110.6	S/T	0.92	0.84	0.71	0.57	0.94	0.87	0.72	0.58	0.96	0.87	0.74	0.60	0.98	0.89	0.76	0.6	1.00	0.96	0.79	0.64	1.00	1.00	0.83	0.69	
	ΔT	25.27	23.48	20.15	16.7	25.22	23.43	20.10	16.7	25.47	23.68	20.36	16.9	25.20	23.42	20.09	16.6	24.96	23.18	19.85	16.4	26.08	24.29	20.96	17.5	Hi PR	270	271	273	277	312	313	315	319	355	357	358	363	403	404	406	410	453	455	457	461	508	509	511	515	
	Lo PR	122	123	126	131	129	130	133	138	135	137	140	145	140	142	145	150	146	147	150	155	152	154	157	162	MBh	120.6	122.2	125.7	131.1	119.5	121.2	124.7	130.1	116.4	118.1	121.6	127.0	111.1	112.8	116.3	121.7	104.6	106.3	109.8	115.2	98.7	100.4	103.9	109.3	
	S/T	0.90	0.86	0.76	0.62	0.93	0.88	0.78	0.6	0.95	0.93	0.85	0.67	1.00	0.95	0.85	0.68	1.00	0.98	0.87	0.72	1.00	0.99	0.89	0.7	ΔT	30.76	28.98	25.65	22.2	30.71	28.93	25.60	22.2	30.96	29.18	25.85	22.4	30.69	28.91	25.58	22.1	30.46	28.67	25.34	21.9	31.57	29.79	26.46	23.0	
	Hi PR	267	268	270	274	309	310	312	316	352	353	355	360	400	401	403	407	450	452	453	458	505	506	508	512	Lo PR	120	121	124	129	127	128	131	136	133	135	138	143	139	140	143	148	144	145	148	153	150	152	155	160	
MBh	122.2	123.9	127.4	132.8	121.2	122.8	126.4	131.8	118.1	119.8	123.3	128.7	112.8	114.5	118.0	123.4	106.3	108.0	111.5	116.9	100.4	102.1	105.6	111.0	S/T	0.92	0.89	0.80	0.66	0.95	0.92	0.82	0.67	0.97	0.94	0.85	0.69	1.00	0.98	0.88	0.72	1.00	1.00	0.90	0.75	1.00	1.00	0.92	0.76		
ΔT	29.57	27.79	24.46	21.0	29.53	27.74	24.41	21.0	29.78	27.99	24.66	21.2	29.51	27.72	24.39	20.9	29.27	27.49	24.16	20.7	30.39	28.60	25.27	21.8	Hi PR	269	270	272	277	311	312	314	319	355	356	358	362	402	403	405	410	453	454	456	460	507	508	510	515		
Lo PR	122	123	126	131	129	130	133	138	135	137	140	145	140	142	145	150	146	147	150	155	152	154	157	162	MBh	123.9	125.5	129.1	134.4	122.8	124.5	128.0	133.4	119.7	121.4	124.9	130.3	114.4	116.1	119.6	125.0	107.9	109.6	113.1	118.5	102.0	103.7	107.2	112.6		
S/T	0.96	0.91	0.83	0.68	0.97	0.94	0.84	0.70	1.00	0.96	0.87	0.70	1.00	1.00	0.90	0.74	1.00	1.00	0.92	0.76	1.00	1.00	0.94	0.79	ΔT	28.77	26.98	23.65	20.2	28.72	26.94	23.61	20.2	28.97	27.19	23.86	20.4	28.70	26.92	23.59	20.1	28.46	26.68	23.35	19.9	29.58	27.79	24.47	21.0		
Hi PR	271	272	274	279	313	314	316	321	357	358	360	364	404	405	407	412	455	456	458	462	509	510	512	517	Lo PR	123	125	128	133	131	132	135	140	137	138	141	146	142	144	147	152	147	149	152	157	154	155	158	163		
Lo PR	123	125	128	133	131	132	135	140	137	138	141	146	142	144	147	152	147	149	152	157	154	155	158	163	kW = Total system power																										

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction access fittings.  
 Design Subcooling, 16 - 19 °F @ the liquid access fitting connection ARI 95 test conditions. Design Superheat 8 - 12°F @ the compressor suction access fitting connection.

Shaded area reflects ACCA (TVA) conditions  
 Amps: Unit amps (comp. + evaporator + condenser fan motors)  
 kW = Total system power

## Electrical Heater Data

MODEL #	MIN AIRFLOW	EHXD-3M15	EHXD-3M30	EHXD-3M45	EHXD-4M15	EHXD-4M30	EHXD-4M45	EHXD-7M15	EHXD-7M30	EHXD-7M45
DFH0903	2400	X	X	X						
DFH0904					X	X	X			
DFH0907								X	X	X
DFH1023	2750	X	X	X						
DFH1024					X	X	X			
DFH1027								X	X	X
DFH1023	3200	X	X	X						
DFH1204					X	X	X			
DFH1207								X	X	X

7.5 Ton HP Data • Models: DFH0903D, DFH0904D, DFH0907D

Down Flow				
Speed Tap	ESP	CFM	RPM	BHP
T1	0.2	1974	438	0.23
	0.4	1789	523	0.27
	0.6	-	-	-
	0.8	-	-	-
T2	0.2	2131	458	0.28
	0.4	1969	531	0.32
	0.6	1782	616	0.38
	0.8	-	-	-
T3	0.2	3072	567	0.69
	0.4	2947	628	0.76
	0.6	2837	684	0.83
	0.8	2695	737	0.89
T4	0.2	3307	840	1.17
	0.4	3216	897	1.25
	0.6	3119	951	1.33
	0.8	3014	1005	1.40
T5	0.2	3370	796	1.17
	0.4	3289	852	1.25
	0.6	3201	905	1.33
	0.8	3070	958	1.40
T6	0.2	2411	488	0.37
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T7	0.2	2666	518	0.48
	0.4	2531	583	0.54
	0.6	2393	647	0.59
	0.8	2231	712	0.65
T8	0.2	2798	533	0.53
	0.4	2658	596	0.60
	0.6	2530	654	0.66
	0.8	2377	717	0.72
T9	0.2	3307	840	1.35
	0.4	3216	897	1.44
	0.6	3119	951	1.53
	0.8	3014	1005	1.61
T10	0.2	3370	796	1.34
	0.4	3289	852	1.43
	0.6	3201	905	1.52
	0.8	3070	958	1.61

Horizontal Flow				
Speed Tap	ESP	CFM	RPM	BHP
T1	0.2	1928	449	0.24
	0.4	1774	535	0.28
	0.6	-	-	-
	0.8	-	-	-
T2	0.2	2141	486	0.30
	0.4	1978	556	0.34
	0.6	1790	639	0.39
	0.8	-	-	-
T3	0.2	3031	594	0.72
	0.4	2909	649	0.79
	0.6	2799	699	0.85
	0.8	2682	749	0.91
T4	0.2	3251	849	1.18
	0.4	3141	906	1.26
	0.6	3035	961	1.34
	0.8	2930	1017	1.42
T5	0.2	3335	807	1.18
	0.4	3229	861	1.26
	0.6	3125	914	1.34
	0.8	3022	968	1.42
T6	0.2	2375	500	0.38
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T7	0.2	2636	534	0.49
	0.4	2506	594	0.55
	0.6	2379	652	0.60
	0.8	-	-	-
T8	0.2	2757	549	0.55
	0.4	2637	607	0.61
	0.6	2509	660	0.66
	0.8	2377	723	0.73
T9	0.2	3251	849	1.18
	0.4	3141	906	1.26
	0.6	3035	961	1.34
	0.8	2930	1017	1.42
T10	0.2	3335	807	1.18
	0.4	3229	861	1.26
	0.6	3125	914	1.34
	0.8	3022	968	1.42

7.5 Ton Fan Data • Models: DFH0903L, DFH0904L, DFH0907L

Down Flow				
Speed Tap	ESP	CFM	RPM	BHP
T1	0.2	2298	473	0.33
	0.4	2147	549	0.39
	0.6	1967	619	0.44
	0.8	1637	732	0.52
	1	-	-	-
	1.2	-	-	-
	1.4	-	-	-
T2	0.2	2345	476	0.34
	0.4	2187	549	0.39
	0.6	2019	621	0.45
	0.8	1686	731	0.53
	1	1496	790	0.57
	1.2	-	-	-
	1.4	-	-	-
T3	0.2	3538	619	0.97
	0.4	3413	672	1.06
	0.6	3301	723	1.14
	0.8	3201	770	1.21
	1	3070	819	1.29
	1.2	2960	870	1.37
	1.4	2839	922	1.45
T4	0.2	3884	710	1.16
	0.4	3721	765	1.25
	0.6	3582	816	1.33
	0.8	3460	865	1.41
	1	3334	918	1.50
	1.2	3070	984	1.60
	1.4	3053	1053	1.72
T5	0.2	3711	638	1.11
	0.4	3592	691	1.20
	0.6	3489	740	1.28
	0.8	3391	786	1.36
	1	3295	835	1.45
	1.2	3178	882	1.53
	1.4	2990	929	1.61
T6	0.2	3027	554	0.64
	0.4	2895	614	0.71
	0.6	2786	670	0.77
	0.8	2657	725	0.84
	1	2500	784	0.91
	1.2	-	-	-
	1.4	-	-	-
T7	0.2	3307	587	0.81
	0.4	3170	644	0.88
	0.6	3063	698	0.96
	0.8	2946	747	1.03
	1	2816	801	1.10
	1.2	2678	856	1.18
	1.4	2403	941	1.29
T8	0.2	3538	619	0.97
	0.4	3413	672	1.06
	0.6	3301	723	1.14
	0.8	3201	770	1.21
	1	3070	819	1.29
	1.2	2960	870	1.37
	1.4	2839	922	1.45
T9	0.2	3884	710	1.16
	0.4	3721	765	1.25
	0.6	3582	816	1.33
	0.8	3460	865	1.41
	1	3334	918	1.50
	1.2	3189	984	1.60
	1.4	3051	1053	1.72
T10	0.2	3711	638	1.26
	0.4	3592	691	1.36
	0.6	3489	740	1.46
	0.8	3391	786	1.55
	1	3295	835	1.65
	1.2	3178	882	1.74
	1.4	3051	929	1.83

Horizontal Flow				
Speed Tap	ESP	CFM	RPM	BHP
T1	0.2	2284	494	0.35
	0.4	2135	562	0.40
	0.6	1976	632	0.45
	0.8	1626	743	0.52
	1	-	-	-
	1.2	-	-	-
	1.4	-	-	-
T2	0.2	2304	497	0.36
	0.4	2152	562	0.40
	0.6	1998	634	0.46
	0.8	1646	746	0.54
	1	-	-	-
	1.2	-	-	-
	1.4	-	-	-
T3	0.2	3466	652	1.03
	0.4	3361	701	1.10
	0.6	3261	744	1.17
	0.8	3176	790	1.24
	1	3058	837	1.32
	1.2	2952	885	1.39
	1.4	2816	943	1.48
T4	0.2	3601	677	1.10
	0.4	3478	736	1.20
	0.6	3370	790	1.29
	0.8	3271	840	1.37
	1	3166	893	1.46
	1.2	3010	958	1.56
	1.4	2917	1024	1.67
T5	0.2	3622	676	1.17
	0.4	3530	723	1.25
	0.6	3432	766	1.33
	0.8	3341	810	1.40
	1	3251	852	1.48
	1.2	3144	898	1.56
	1.4	3006	947	1.64
T6	0.2	2983	582	0.67
	0.4	2864	635	0.73
	0.6	2749	687	0.79
	0.8	2630	740	0.85
	1	2492	801	0.93
	1.2	-	-	-
	1.4	-	-	-
T7	0.2	3230	617	0.83
	0.4	3112	667	0.90
	0.6	3005	716	0.97
	0.8	2905	761	1.03
	1	2801	817	1.10
	1.2	2673	872	1.18
	1.4	2325	978	1.32
T8	0.2	3466	652	1.03
	0.4	3361	701	1.10
	0.6	3261	744	1.17
	0.8	3176	790	1.24
	1	3058	837	1.32
	1.2	2952	885	1.39
	1.4	2816	943	1.48
T9	0.2	3601	677	1.10
	0.4	3478	736	1.20
	0.6	3370	790	1.29
	0.8	3271	840	1.37
	1	3166	893	1.46
	1.2	3040	958	1.56
	1.4	3917	1024	1.67
T10	0.2	3622	676	1.17
	0.4	3530	723	1.25
	0.6	3432	766	1.33
	0.8	3341	810	1.40
	1	3251	852	1.48
	1.2	3144	898	1.56
	1.4	3006	947	1.64

7.5 Ton Fan Data • Models: DFH0903W, DFH0904W, DFH0907W

Down Flow				
Speed Tap	ESP	CFM	RPM	BHP
T1	0.2	2465	490	0.36
	0.4	2293	561	0.42
	0.6	2148	626	0.46
	0.8	1911	715	0.53
	1	1614	797	0.59
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
1.8	-	-	-	
T2	0.2	2465	499	0.38
	0.4	2325	567	0.44
	0.6	2182	632	0.49
	0.8	1993	705	0.54
	1	1659	804	0.62
	1.2	1498	853	0.66
	1.4	-	-	-
	1.6	-	-	-
1.8	-	-	-	
T3	0.2	3657	556	0.93
	0.4	3559	616	1.03
	0.6	3467	669	1.12
	0.8	3391	710	1.19
	1	3290	761	1.27
	1.2	3176	816	1.36
	1.4	3058	868	1.45
	1.6	2888	937	1.57
1.8	2785	975	1.63	
T4	0.2	3748	664	1.16
	0.4	3637	711	1.24
	0.6	3539	756	1.32
	0.8	3448	803	1.40
	1	3339	847	1.48
	1.2	3226	893	1.56
	1.4	3108	947	1.65
	1.6	3001	999	1.74
1.8	2840	1041	1.82	
T5	0.2	3850	674	1.25
	0.4	3745	723	1.34
	0.6	3655	770	1.43
	0.8	3546	815	1.51
	1	3445	858	1.59
	1.2	3359	902	1.67
	1.4	3242	945	1.75
	1.6	3120	991	1.84
1.8	3001	1042	1.93	
T6	0.2	3502	618	0.90
	0.4	3381	669	0.97
	0.6	3533	721	1.05
	0.8	3145	767	1.12
	1	3047	817	1.19
	1.2	2908	866	1.26
	1.4	2766	918	1.34
	1.6	2491	1010	1.47
1.8	-	-	-	

Horizontal Flow				
Speed Tap	ESP	CFM	RPM	BHP
T1	0.2	2368	510	0.38
	0.4	2247	572	0.42
	0.6	2113	632	0.47
	0.8	1961	704	0.52
	1	1600	802	0.60
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
1.8	-	-	-	
T2	0.2	2449	504	0.39
	0.4	2330	571	0.44
	0.6	2181	638	0.49
	0.8	1991	59	0.05
	1	1645	35	0.03
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
1.8	-	-	-	
T3	0.2	3638	587	0.98
	0.4	3533	642	1.07
	0.6	3437	691	1.15
	0.8	3359	728	1.22
	1	3256	777	1.30
	1.2	3142	828	1.38
	1.4	3027	876	1.46
	1.6	2863	941	1.57
1.8	2766	977	1.63	
T4	0.2	3711	687	1.20
	0.4	3608	730	1.27
	0.6	3517	772	1.35
	0.8	3434	816	1.42
	1	3334	856	1.49
	1.2	3231	900	1.57
	1.4	3125	951	1.66
	1.6	2986	1001	1.75
1.8	2885	1041	1.82	
T5	0.2	3806	696	1.29
	0.4	3708	741	1.38
	0.6	3624	785	1.46
	0.8	3523	827	1.54
	1	3431	867	1.61
	1.2	3352	908	1.69
	1.4	3246	949	1.76
	1.6	3136	993	1.84
1.8	2989	1041	1.93	
T6	0.2	3383	644	0.94
	0.4	3283	692	1.01
	0.6	3167	738	1.08
	0.8	3076	785	1.14
	1	2977	827	1.21
	1.2	2849	883	1.29
	1.4	2670	950	1.38
	1.6	2404	1034	1.51
1.8	-	-	-	

7.5 Ton Fan Data • Models: DFH0903W, DFH0904W, DFH0907W

Down Flow				
Speed Tap	ESP	CFM	RPM	BHP
T7	0.2	3670	637	1.02
	0.4	3542	686	1.10
	0.6	3430	737	1.18
	0.8	3312	785	1.25
	1	3207	832	1.33
	1.2	3098	878	1.40
	1.4	2965	928	1.48
	1.6	2829	982	1.57
	1.8	2544	1070	1.71
T8	0.2	3657	556	0.93
	0.4	3559	616	1.03
	0.6	3467	669	1.12
	0.8	3391	710	1.19
	1	3290	761	1.27
	1.2	3176	816	1.36
	1.4	3058	868	1.45
	1.6	2888	937	1.57
	1.8	2785	975	1.63
T9	0.2	3748	664	1.42
	0.4	3637	711	1.52
	0.6	3539	756	1.62
	0.8	3448	803	1.72
	1	3339	847	1.81
	1.2	3226	893	1.91
	1.4	3108	947	2.03
	1.6	3001	999	2.14
	1.8	2840	1041	2.23
T10	0.2	3850	674	1.98
	0.4	3745	723	2.12
	0.6	3655	770	2.26
	0.8	3546	815	2.39
	1	3445	858	2.52
	1.2	3359	902	2.65
	1.4	3242	945	2.77
	1.6	3120	991	2.91
	1.8	3001	1042	3.06

Horizontal Flow				
Speed Tap	ESP	CFM	RPM	BHP
T7	0.2	3521	665	1.06
	0.4	3422	713	1.14
	0.6	3325	756	1.21
	0.8	3217	802	1.28
	1	3122	846	1.35
	1.2	3027	871	1.39
	1.4	2893	948	1.51
	1.6	2762	999	1.59
	1.8	2390	1100	1.76
T8	0.2	3711	687	1.15
	0.4	3608	730	1.22
	0.6	3517	772	1.29
	0.8	3434	816	1.36
	1	3334	856	1.43
	1.2	3231	900	1.50
	1.4	3125	951	1.59
	1.6	2986	1001	1.67
	1.8	2885	1041	1.74
T9	0.2	3711	687	1.20
	0.4	3608	730	1.27
	0.6	3517	772	1.35
	0.8	3434	816	1.42
	1	3334	856	1.49
	1.2	3231	900	1.57
	1.4	3125	951	1.66
	1.6	2986	1001	1.75
	1.8	2885	1041	1.82
T10	0.2	3806	696	1.29
	0.4	3708	741	1.38
	0.6	3624	785	1.46
	0.8	3523	827	1.54
	1	3431	867	1.61
	1.2	3352	908	1.69
	1.4	3246	949	1.76
	1.6	3136	993	1.84
	1.8	2989	1041	1.93

8.5 Ton HP Data • Models: DFH1023D, DFH1024D, DFH1027D

Down Flow				
Speed Tap	ESP	CFM	RPM	BHP
T1	0.2	1974	438	0.23
	0.4	1789	523	0.27
	0.6	-	-	-
	0.8	-	-	-
T2	0.2	2131	458	0.28
	0.4	1969	531	0.32
	0.6	1782	616	0.38
	0.8	-	-	-
T3	0.2	3072	567	0.69
	0.4	2947	628	0.76
	0.6	2837	684	0.83
	0.8	2695	737	0.89
T4	0.2	3711	638	1.09
	0.4	3592	691	1.18
	0.6	3430	740	1.26
	0.8	3391	786	1.34
T5	0.2	3737	651	1.16
	0.4	3623	703	1.25
	0.6	3513	751	1.34
	0.8	3410	799	1.42
T6	0.2	2708	521	0.49
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T7	0.2	2955	551	0.62
	0.4	2819	612	0.68
	0.6	2715	668	0.75
	0.8	-	-	-
T8	0.2	3072	567	0.69
	0.4	2947	628	0.76
	0.6	2837	684	0.83
	0.8	2695	737	0.89
T9	0.2	3711	638	1.09
	0.4	3592	691	1.18
	0.6	3430	740	1.26
	0.8	3391	786	1.34
T10	0.2	3737	651	1.16
	0.4	3623	703	1.25
	0.6	3513	751	1.34
	0.8	3410	799	1.42

Horizontal Flow				
Speed Tap	ESP	CFM	RPM	BHP
T1	0.2	1928	449	0.24
	0.4	1774	535	0.28
	0.6	-	-	-
	0.8	-	-	-
T2	0.2	-	-	-
	0.4	1978	556	0.34
	0.6	1790	639	0.39
	0.8	-	-	-
T3	0.2	3031	594	0.72
	0.4	2909	649	0.79
	0.6	2799	699	0.85
	0.8	2682	749	0.91
T4	0.2	3601	677	1.15
	0.4	3503	724	1.23
	0.6	3405	773	1.31
	0.8	3311	819	1.39
T5	0.2	3686	687	1.22
	0.4	3591	732	1.30
	0.6	3494	775	1.38
	0.8	3402	819	1.46
T6	0.2	2675	543	0.51
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T7	0.2	2914	572	0.64
	0.4	2797	630	0.70
	0.6	2680	681	0.76
	0.8	-	-	-
T8	0.2	3062	590	0.72
	0.4	2944	644	0.78
	0.6	2838	693	0.84
	0.8	2713	742	0.90
T9	0.2	3601	677	1.15
	0.4	3503	724	1.23
	0.6	3405	773	1.31
	0.8	3311	819	1.39
T10	0.2	3686	687	1.22
	0.4	3591	732	1.30
	0.6	3494	775	1.38
	0.8	3402	819	1.46



8.5 Ton Fan Data • Models: DFH1023L, DFH1024L, DFH1027L

Down Flow				
Speed Tap	ESP	CFM	RPM	BHP
T1	0.2	2298	473	0.33
	0.4	2147	549	0.39
	0.6	1967	619	0.44
	0.8	-	-	-
	1	-	-	-
	1.2	-	-	-
	1.4	-	-	-
T2	0.2	2345	476	0.34
	0.4	2187	549	0.39
	0.6	2019	621	0.45
	0.8	1686	731	0.53
	1	-	-	-
	1.2	-	-	-
T3	0.2	3538	619	0.97
	0.4	3413	672	1.06
	0.6	3301	723	1.14
	0.8	3201	770	1.21
	1	3040	819	1.29
	1.2	2960	870	1.37
	1.4	2839	922	1.45
T4	0.2	3711	638	1.27
	0.4	3592	691	1.35
	0.6	3489	740	1.42
	0.8	3391	786	1.50
	1	3295	835	1.58
	1.2	3178	882	1.67
	1.4	3051	929	1.78
T5	0.2	4156	692	1.50
	0.4	4050	741	1.61
	0.6	3948	785	1.71
	0.8	3843	832	1.81
	1	3750	873	1.90
	1.2	3658	915	1.99
	1.4	3450	959	2.09
T6	0.2	3255	582	0.78
	0.4	3118	640	0.86
	0.6	3005	693	0.93
	0.8	2895	743	0.99
	1	2755	799	1.07
	1.2	2755	799	1.07
	1.4	-	-	-
T7	0.2	3454	605	0.91
	0.4	3339	661	0.99
	0.6	3217	714	1.07
	0.8	3103	763	1.14
	1	2983	815	1.22
	1.2	2858	867	1.30
	1.4	2705	923	1.38
T8	0.2	3711	638	1.11
	0.4	3592	691	1.20
	0.6	3489	740	1.28
	0.8	3391	786	1.36
	1	3295	835	1.45
	1.2	3178	882	1.53
	1.4	3051	929	1.61
T9	0.2	4211	671	1.27
	0.4	4098	712	1.35
	0.6	3967	751	1.42
	0.8	3835	792	1.50
	1	3753	836	1.58
	1.2	3450	882	1.67
	1.4	3449	940	1.78
T10	0.2	4156	692	1.50
	0.4	4050	741	1.61
	0.6	3948	785	1.71
	0.8	3843	832	1.81
	1	3750	873	1.90
	1.2	3658	915	1.99
	1.4	3450	959	2.09

Horizontal Flow				
Speed Tap	ESP	CFM	RPM	BHP
T1	0.2	2284	494	0.35
	0.4	2135	562	0.40
	0.6	1976	632	0.45
	0.8	-	-	-
	1	-	-	-
	1.2	-	-	-
	1.4	-	-	-
T2	0.2	2304	497	0.36
	0.4	2152	562	0.40
	0.6	1998	634	0.46
	0.8	-	-	-
	1	-	-	-
	1.2	-	-	-
T3	0.2	3466	652	1.03
	0.4	3361	701	1.10
	0.6	3261	744	1.17
	0.8	3176	790	1.24
	1	3058	837	1.32
	1.2	2952	885	1.39
	1.4	2816	943	1.48
T4	0.2	3835	567	1.07
	0.4	3756	603	1.14
	0.6	3662	648	1.23
	0.8	3565	694	1.31
	1	3503	724	1.37
	1.2	3397	776	1.47
	1.4	3262	844	1.60
T5	0.2	3971	505	1.10
	0.4	3897	539	1.17
	0.6	3806	580	1.26
	0.8	3707	627	1.36
	1	3653	652	1.42
	1.2	3551	701	1.53
	1.4	3422	764	1.66
T6	0.2	3205	611	0.82
	0.4	3089	663	0.89
	0.6	2982	710	0.95
	0.8	2877	757	1.01
	1	2732	813	1.09
	1.2	-	-	-
	1.4	-	-	-
T7	0.2	3376	640	0.96
	0.4	3279	689	1.03
	0.6	3172	736	1.10
	0.8	3070	781	1.17
	1	2959	831	1.24
	1.2	2836	881	1.32
	1.4	2650	955	1.43
T8	0.2	3622	676	1.17
	0.4	3530	723	1.25
	0.6	3432	766	1.33
	0.8	3341	810	1.40
	1	3251	852	1.48
	1.2	3144	898	1.56
	1.4	3006	947	1.64
T9	0.2	3835	567	1.07
	0.4	3756	603	1.14
	0.6	3662	648	1.23
	0.8	3565	694	1.31
	1	3503	724	1.37
	1.2	3397	776	1.47
	1.4	3262	844	1.60
T10	0.2	3971	505	1.10
	0.4	3897	539	1.17
	0.6	3806	580	1.26
	0.8	3707	627	1.36
	1	3653	652	1.42
	1.2	3551	701	1.53
	1.4	3422	764	1.66

8.5 Ton Fan Data • Models: DFH1023W, DFH1024W, DFH1027W

Down Flow				
Speed Tap	ESP	CFM	RPM	BHP
T1	0.2	2465	490	0.36
	0.4	2293	561	0.42
	0.6	2148	626	0.46
	0.8	1911	715	0.53
	1	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
1.8	-	-	-	
T2	0.2	2465	499	0.38
	0.4	2325	567	0.44
	0.6	2182	632	0.49
	0.8	1993	705	0.54
	1	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
1.8	-	-	-	
T3	0.2	3794	663	1.16
	0.4	3688	711	1.24
	0.6	3572	758	1.32
	0.8	3468	807	1.41
	1	3370	852	1.49
	1.2	3259	895	1.56
	1.4	3144	942	1.64
	1.6	3011	990	1.73
1.8	2843	1052	1.84	
T4	0.2	4121	699	1.43
	0.4	4019	745	1.52
	0.6	3934	790	1.61
	0.8	3830	833	1.70
	1	3697	876	1.79
	1.2	3617	918	1.87
	1.4	3527	959	1.96
	1.6	3408	1002	2.05
1.8	3262	1048	2.14	
T5	0.2	4262	718	1.56
	0.4	4164	761	1.66
	0.6	4060	805	1.75
	0.8	3966	851	1.85
	1	3864	891	1.94
	1.2	3773	932	2.03
	1.4	3687	973	2.12
	1.6	3576	1012	2.20
1.8	3463	1055	2.30	
T6	0.2	3600	628	0.96
	0.4	3479	679	1.04
	0.6	3363	728	1.12
	0.8	3256	775	1.19
	1	3144	823	1.26
	1.2	3034	870	1.34
	1.4	2910	921	1.41
	1.6	2726	987	1.52
1.8	-	-	-	

Horizontal Flow				
Speed Tap	ESP	CFM	RPM	BHP
T1	0.2	2368	510	0.38
	0.4	2247	572	0.42
	0.6	2113	632	0.47
	0.8	1961	704	0.52
	1	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
1.8	-	-	-	
T2	0.2	2449	504	0.39
	0.4	2330	571	0.44
	0.6	2181	638	0.49
	0.8	1991	59	0.05
	1	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
1.8	-	-	-	
T3	0.2	3711	687	1.20
	0.4	3608	730	1.27
	0.6	3517	772	1.35
	0.8	3434	816	1.42
	1	3334	856	1.49
	1.2	3231	900	1.57
	1.4	3125	951	1.66
	1.6	2986	1001	1.75
1.8	2885	1041	1.82	
T4	0.2	3989	718	1.47
	0.4	3894	761	1.55
	0.6	3816	803	1.64
	0.8	3722	843	1.72
	1	3602	883	1.80
	1.2	3529	922	1.88
	1.4	3449	961	1.96
	1.6	3343	1001	2.04
1.8	3215	1044	2.13	
T5	0.2	4123	750	1.63
	0.4	4032	790	1.72
	0.6	3944	831	1.81
	0.8	3866	868	1.89
	1	3774	905	1.97
	1.2	3690	943	2.05
	1.4	3612	980	2.13
	1.6	3506	943	2.05
1.8	3401	1068	2.32	
T6	0.2	3460	659	1.01
	0.4	3343	705	1.08
	0.6	3244	752	1.15
	0.8	3154	60	0.09
	1	3043	839	1.29
	1.2	2940	890	1.37
	1.4	2812	947	1.45
	1.6	2695	989	1.52
1.8	-	-	-	

8.5 Ton Fan Data • Models: DFH1023W, DFH1024W, DFH1027W

Down Flow				
Speed Tap	ESP	CFM	RPM	BHP
T7	0.2	3785	652	1.11
	0.4	3679	701	1.19
	0.6	3556	748	1.27
	0.8	3451	796	1.36
	1	3359	841	1.43
	1.2	3249	886	1.51
	1.4	3103	933	1.59
	1.6	2981	983	1.67
	1.8	2754	1056	1.80
T8	0.2	3794	663	1.16
	0.4	3688	711	1.24
	0.6	3572	758	1.32
	0.8	3468	807	1.41
	1	3370	852	1.49
	1.2	3259	895	1.56
	1.4	3144	942	1.64
	1.6	3011	990	1.73
	1.8	2843	1052	1.84
T9	0.2	4121	699	1.43
	0.4	4019	745	1.52
	0.6	3934	790	1.61
	0.8	3830	833	1.70
	1	3697	876	1.79
	1.2	3617	918	1.87
	1.4	3527	959	1.96
	1.6	3408	1002	2.05
	1.8	3262	1048	2.14
T10	0.2	4262	718	1.56
	0.4	4164	761	1.66
	0.6	4060	805	1.75
	0.8	3966	851	1.85
	1	3864	891	1.94
	1.2	3773	932	2.03
	1.4	3687	973	2.12
	1.6	3576	1012	2.20
	1.8	3463	1055	2.30

Horizontal Flow				
Speed Tap	ESP	CFM	RPM	BHP
T7	0.2	3626	683	1.16
	0.4	3532	728	1.24
	0.6	3431	771	1.31
	0.8	3344	815	1.39
	1	3245	858	1.46
	1.2	3125	905	1.54
	1.4	3029	955	1.63
	1.6	2887	1011	1.72
	1.8	2690	1075	1.83
T8	0.2	3711	687	1.20
	0.4	3608	730	1.27
	0.6	3517	772	1.35
	0.8	3434	816	1.42
	1	3334	856	1.49
	1.2	3231	900	1.57
	1.4	3125	951	1.66
	1.6	2986	1001	1.75
	1.8	2885	1041	1.82
T9	0.2	3989	718	1.47
	0.4	3894	761	1.55
	0.6	3816	803	1.64
	0.8	3722	843	1.72
	1	3602	883	1.80
	1.2	3529	922	1.88
	1.4	3449	961	1.96
	1.6	3343	1001	2.04
	1.8	3215	1044	2.13
T10	0.2	4123	750	1.63
	0.4	4032	790	1.72
	0.6	3944	831	1.81
	0.8	3866	868	1.89
	1	3774	905	1.97
	1.2	3690	943	2.05
	1.4	3612	980	2.13
	1.6	3506	943	2.05
	1.8	3401	1068	2.32

10.0 Ton HP Data • Models: DFH1203D, DFH1204D, DFH1207D

Down Flow				
Speed Tap	ESP	CFM	RPM	BHP
T1	0.2	2356	466	0.30
	0.4	2189	549	0.36
	0.6	-	-	-
	0.8	-	-	-
T2	0.2	3026	543	0.56
	0.4	2875	608	0.63
	0.6	2733	670	0.70
	0.8	2346	778	0.81
T3	0.2	4008	649	1.16
	0.4	3879	704	1.26
	0.6	3759	758	1.35
	0.8	3664	807	1.44
T4	0.2	4152	693	1.33
	0.4	4056	746	1.44
	0.6	3940	793	1.53
	0.8	3821	846	1.63
T5	0.2	4430	697	1.49
	0.4	4314	746	1.60
	0.6	4171	794	1.70
	0.8	4054	842	1.80
T6	0.2	3203	555	0.64
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T7	0.2	3490	588	0.79
	0.4	3331	645	0.87
	0.6	3211	704	0.95
	0.8	-	-	-
T8	0.2	3656	606	0.88
	0.4	3519	664	0.96
	0.6	3388	721	1.04
	0.8	3200	773	1.12
T9	0.2	4152	693	1.33
	0.4	4056	746	1.44
	0.6	3940	793	1.53
	0.8	3821	846	1.63
T10	0.2	4430	697	1.49
	0.4	4314	746	1.60
	0.6	4171	794	1.70
	0.8	4054	842	1.80

Horizontal Flow				
Speed Tap	ESP	CFM	RPM	BHP
T1	0.2	2308	469	0.30
	0.4	1969	586	0.38
	0.6	-	-	-
	0.8	-	-	-
T2	0.2	2962	549	0.57
	0.4	2819	612	0.64
	0.6	2673	671	0.70
	0.8	2301	772	0.80
T3	0.2	3897	669	1.20
	0.4	3800	718	1.28
	0.6	3694	765	1.37
	0.8	3588	814	1.45
T4	0.2	4102	684	1.32
	0.4	4015	735	1.41
	0.6	3911	778	1.50
	0.8	3804	826	1.59
T5	0.2	4287	716	1.54
	0.4	4193	760	1.63
	0.6	4097	808	1.73
	0.8	3995	849	1.82
T6	0.2	3154	572	0.66
	0.4	-	-	-
	0.6	-	-	-
	0.8	-	-	-
T7	0.2	3405	604	0.81
	0.4	3281	660	0.89
	0.6	3150	720	0.97
	0.8	-	-	-
T8	0.2	3535	621	0.90
	0.4	3417	676	0.98
	0.6	3299	730	1.06
	0.8	3161	791	1.14
T9	0.2	4102	684	1.32
	0.4	4015	735	1.41
	0.6	3911	778	1.50
	0.8	3804	826	1.59
T10	0.2	4287	716	1.54
	0.4	4193	760	1.63
	0.6	4097	808	1.73
	0.8	3995	849	1.82

10.0 Ton Fan Data • DFH1203L, DFH1204L, DFH1207L

Down Flow					Horizontal Flow				
Speed Tap	ESP	CFM	RPM	BHP	Speed Tap	ESP	CFM	RPM	BHP
T1	0.2	2452	481	0.35	T1	0.2	2457	493	0.35
	0.4	2285	561	0.40		0.4	2301	571	0.41
	0.6	-	-	-		0.6	-	-	-
	0.8	-	-	-		0.8	-	-	-
	1	-	-	-		1	-	-	-
	1.2	-	-	-		1.2	-	-	-
	1.4	-	-	-		1.4	-	-	-
T2	0.2	2620	496	0.39	T2	0.2	2577	597	0.47
	0.4	2455	571	0.45		0.4	2435	650	0.51
	0.6	2061	685	0.54		0.6	2053	735	0.58
	0.8	-	-	-		0.8	-	-	-
	1	-	-	-		1	-	-	-
	1.2	-	-	-		1.2	-	-	-
T3	0.2	4315	689	1.41	T3	0.2	4277	696	1.43
	0.4	4156	736	1.51		0.4	4174	739	1.51
	0.6	4047	787	1.61		0.6	4076	785	1.61
	0.8	3941	838	1.72		0.8	3970	831	1.71
	1	3828	881	1.81		1	3822	888	1.82
	1.2	3710	929	1.91		1.2	3702	938	1.92
	1.4	3369	1029	2.11		1.4	3427	1019	2.09
T4	0.2	4501	714	1.61	T4	0.2	4477	719	1.62
	0.4	4393	759	1.71		0.4	4373	763	1.72
	0.6	4279	809	1.82		0.6	4276	808	1.82
	0.8	4142	857	1.93		0.8	4180	853	1.92
	1	4037	900	2.03		1	4049	901	2.03
	1.2	3930	945	2.13		1.2	3933	950	2.14
	1.4	3786	995	2.24		1.4	3791	1001	2.25
T5	0.2	4687	732	1.78	T5	0.2	4669	749	1.82
	0.4	4584	777	1.89		0.4	4559	794	1.93
	0.6	4466	825	2.00		0.6	4466	836	2.03
	0.8	4361	872	2.12		0.8	4372	876	2.13
	1	4246	916	2.22		1	4226	924	2.24
	1.2	4120	957	2.32		1.2	4126	970	2.35
	1.4	3996	1000	2.43		1.4	4002	1010	2.45
T6	0.2	3842	643	1.08	T6	0.2	3831	654	1.10
	0.4	3712	697	1.17		0.4	3730	703	1.18
	0.6	3600	751	1.26		0.6	3626	751	1.26
	0.8	3477	800	1.34		0.8	3503	803	1.35
	1	3353	855	1.44		1	3377	859	1.44
	1.2	-	-	-		1.2	-	-	-
T7	0.2	4125	675	1.30	T7	0.2	4102	684	1.32
	0.4	4012	725	1.40		0.4	4015	735	1.41
	0.6	3896	776	1.49		0.6	3911	778	1.50
	0.8	3789	826	1.59		0.8	3804	826	1.59
	1	3679	873	1.68		1	3700	875	1.68
	1.2	3519	928	1.79		1.2	3540	933	1.80
	1.4	3146	1027	1.98		1.4	3162	1028	1.98
T8	0.2	4315	689	1.41	T8	0.2	4277	696	1.43
	0.4	4156	736	1.51		0.4	4174	739	1.51
	0.6	4047	787	1.61		0.6	4076	785	1.61
	0.8	3941	838	1.72		0.8	3970	831	1.71
	1	3828	881	1.81		1	3822	888	1.82
	1.2	3710	929	1.91		1.2	3702	938	1.92
	1.4	3369	1029	2.11		1.4	3427	1019	2.09
T9	0.2	4501	714	1.61	T9	0.2	4477	719	1.62
	0.4	4393	759	1.71		0.4	4373	763	1.72
	0.6	4279	809	1.82		0.6	4276	808	1.82
	0.8	4142	857	1.93		0.8	4180	853	1.92
	1	4037	900	2.03		1	4049	901	2.03
	1.2	3930	945	2.13		1.2	3933	950	2.14
	1.4	3786	995	2.24		1.4	3791	1001	2.25
T10	0.2	4687	732	1.78	T10	0.2	4669	749	1.82
	0.4	4584	777	1.89		0.4	4559	794	1.93
	0.6	4466	825	2.00		0.6	4466	836	2.03
	0.8	4361	872	2.12		0.8	4372	876	2.13
	1	4246	916	2.22		1	4226	924	2.24
	1.2	4120	957	2.32		1.2	4126	970	2.35
	1.4	3996	1000	2.43		1.4	4002	1010	2.45

10.0 Ton Fan Data • Models: DFH1203W, DFH1204W, DFH1207W

Down Flow				
Speed Tap	ESP	CFM	RPM	BHP
T1	0.2	2682	504	0.45
	0.4	2553	577	0.51
	0.6	2181	691	0.61
	0.8	-	-	-
	1	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
1.8	-	-	-	
T2	0.2	2778	514	0.47
	0.4	2633	583	0.53
	0.6	2246	698	0.64
	0.8	2046	751	0.68
	1	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
1.8	-	-	-	
T3	0.2	4809	751	1.68
	0.4	4693	797	1.78
	0.6	4579	840	1.88
	0.8	4480	883	1.97
	1	4374	920	2.05
	1.2	4234	962	2.15
	1.4	4107	1004	2.24
	1.6	3846	1086	2.43
1.8	3558	1151	2.57	
T4	0.2	4992	772	1.85
	0.4	4885	818	1.96
	0.6	4765	857	2.05
	0.8	4663	900	2.16
	1	4556	937	2.25
	1.2	4463	977	2.34
	1.4	4340	1016	2.44
	1.6	4146	1076	2.58
1.8	3833	1159	2.78	
T5	0.2	5194	643	1.64
	0.4	5093	676	1.72
	0.6	4988	710	1.81
	0.8	4867	749	1.91
	1	4769	781	1.99
	1.2	4659	816	2.08
	1.4	4543	854	2.18
	1.6	4477	875	2.23
1.8	4050	997	2.54	
T6	0.2	4525	714	1.41
	0.4	4413	760	1.50
	0.6	4282	807	1.60
	0.8	4143	853	1.69
	1	4039	894	1.77
	1.2	3913	936	1.85
	1.4	3688	1013	2.00
	1.6	3352	1089	2.15
1.8	3210	1126	2.23	

Horizontal Flow				
Speed Tap	ESP	CFM	RPM	BHP
T1	0.2	2701	550	0.49
	0.4	2631	586	0.52
	0.6	2304	701	0.62
	0.8	2163	750	0.66
	1	-	-	-
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
1.8	-	-	-	
T2	0.2	2827	532	0.48
	0.4	2693	594	0.54
	0.6	2355	705	0.64
	0.8	2193	759	0.69
	1	2068	806	0.73
	1.2	-	-	-
	1.4	-	-	-
	1.6	-	-	-
1.8	-	-	-	
T3	0.2	4683	789	1.76
	0.4	4593	814	1.82
	0.6	4497	855	1.91
	0.8	4388	894	2.00
	1	4297	932	2.08
	1.2	4167	972	2.17
	1.4	4085	1004	2.24
	1.6	3836	1089	2.43
1.8	3553	1153	2.58	
T4	0.2	4878	798	1.91
	0.4	4779	837	2.01
	0.6	4692	874	2.10
	0.8	4580	912	2.19
	1	4491	951	2.28
	1.2	4379	988	2.37
	1.4	4280	11	0.03
	1.6	4170	1057	2.53
1.8	3800	1163	2.79	
T5	0.2	5040	676	1.72
	0.4	4950	706	1.80
	0.6	4855	738	1.88
	0.8	4746	774	1.97
	1	4657	803	2.05
	1.2	4559	836	2.13
	1.4	4454	871	2.22
	1.6	4394	891	2.27
1.8	4055	1004	2.56	
T6	0.2	4277	729	1.44
	0.4	4146	775	1.53
	0.6	4035	822	1.62
	0.8	3923	865	1.71
	1	3810	913	1.80
	1.2	3657	965	1.91
	1.4	3353	1048	2.07
	1.6	3157	1098	2.17
1.8	3024	1130	2.23	

10.0 Ton Fan Data • Models: DFH1203W, DFH1204W, DFH1207W

Down Flow				
Speed Tap	ESP	CFM	RPM	BHP
T7	0.2	4654	732	1.53
	0.4	4529	777	1.62
	0.6	4414	823	1.72
	0.8	4299	864	1.81
	1	4170	907	1.89
	1.2	4063	949	1.98
	1.4	3869	1012	2.12
	1.6	3543	1093	2.28
	1.8	3369	1139	2.38
T8	0.2	4809	751	1.68
	0.4	4693	797	1.78
	0.6	4579	840	1.88
	0.8	4480	883	1.97
	1	4374	920	2.05
	1.2	4234	962	2.15
	1.4	4107	1004	2.24
	1.6	3846	1086	2.43
	1.8	3558	1151	2.57
T9	0.2	4992	772	1.85
	0.4	4885	818	1.96
	0.6	4765	857	2.05
	0.8	4663	900	2.16
	1	4556	937	2.25
	1.2	4463	977	2.34
	1.4	4340	1016	2.44
	1.6	4146	1076	2.58
	1.8	3833	1159	2.78
T10	0.2	5194	643	1.64
	0.4	5093	676	1.72
	0.6	4988	710	1.81
	0.8	4867	749	1.91
	1	4769	781	1.99
	1.2	4659	816	2.08
	1.4	4543	854	2.18
	1.6	4477	875	2.23
	1.8	4050	997	2.54

Horizontal Flow				
Speed Tap	ESP	CFM	RPM	BHP
T7	0.2	4391	746	1.56
	0.4	4255	791	1.65
	0.6	4158	836	1.75
	0.8	4045	879	1.84
	1	3927	923	1.93
	1.2	3797	976	2.04
	1.4	3597	1035	2.16
	1.6	3287	1110	2.32
	1.8	3155	1146	2.40
T8	0.2	4683	789	1.76
	0.4	4593	814	1.82
	0.6	4497	855	1.91
	0.8	4388	894	2.00
	1	4297	932	2.08
	1.2	4167	972	2.17
	1.4	4085	1004	2.24
	1.6	3836	1089	2.43
	1.8	3553	1153	2.58
T9	0.2	4878	798	1.91
	0.4	4779	837	2.01
	0.6	4692	874	2.10
	0.8	4580	912	2.19
	1	4491	951	2.28
	1.2	44	988	2.37
	1.4	4280	11	0.03
	1.6	4170	1057	2.53
	1.8	3800	1163	2.79
T10	0.2	5040	676	1.72
	0.4	4950	706	1.80
	0.6	4855	738	1.88
	0.8	4746	774	1.97
	1	4657	803	2.05
	1.2	4559	836	2.13
	1.4	4454	871	2.22
	1.6	4394	891	2.27
	1.8	4055	1004	2.56

## Static Pressure

---

7.5-10 TONS		
DOWNFLOW ECONOMIZER PRESSURE DROP		
Cabinet	CFM	SP in. wg.
7.5 Ton	2250	.04"
	3000	.07"
	3750	.11"
8.5 Ton	2550	.06"
	3400	.10"
	4250	.16"
10 Ton	3000	.08"
	4000	.13"
	5000	.22"

7.5-10 TONS		
HORIZONTAL ECONOMIZER PRESSURE DROP		
Cabinet	CFM	SP in. wg.
7.5 Ton	2250	.05"
	3000	.07"
	3750	.13"
8.5 Ton	2550	.07"
	3400	.13"
	4250	.18"
10 Ton	3000	.07"
	4000	.12"
	5000	.19"



# Heating Data

## DFH090

100 % Capacity

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	109.62	102.73	95.95	89.28	85.00	81.90	73.94	66.54	60.49	56.03	52.76	51.00	48.73	43.07	37.40	31.73	26.07
T/R	32.53	30.78	29.03	27.29	26.50	25.28	22.82	20.54	18.67	17.29	16.28	15.74	15.04	13.29	11.54	9.79	8.04
KW	7.74	7.62	7.51	7.40	7.08	7.28	7.17	7.05	6.94	6.83	6.71	6.64	6.60	6.48	6.37	6.26	6.14
AMPS	30.5	30.0	29.5	29.1	27.7	28.6	28.1	27.6	27.1	26.6	26.1	25.8	25.6	25.1	24.6	24.1	23.6
COP	4.15	3.95	3.74	3.54	3.40	3.30	3.02	2.76	2.55	2.41	2.30	2.25	2.16	1.95	1.72	1.49	1.24
Hi PR	382	369	357	344	337	332	320	307	295	282	270	263	258	245	233	220	208
LO PR	137	128	120	111	106	103	94	86	77	69	60	55	52	43	35	26	18

## DFH102

100 % Capacity

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	128.34	120.41	112.61	104.94	100.00	96.43	87.35	78.84	71.87	66.75	63.01	61.00	58.40	51.90	45.40	38.90	32.40
T/R	38.09	36.08	34.08	32.07	30.87	29.77	26.96	24.33	22.18	20.60	19.45	18.83	18.02	16.02	14.01	12.01	10.00
KW	9.02	8.91	8.80	8.69	8.62	8.58	8.46	8.35	8.24	8.13	8.01	7.95	7.90	7.79	7.68	7.56	7.45
AMPS	35.4	34.9	34.5	34.0	33.7	33.5	33.0	32.5	32.0	31.5	31.0	30.7	30.6	30.1	29.6	29.1	28.6
COP	4.17	3.96	3.75	3.54	3.40	3.30	3.03	2.77	2.56	2.41	2.30	2.25	2.17	1.95	1.73	1.51	1.27
Hi PR	390	377	364	352	344	339	326	314	301	288	276	268	263	250	238	225	212
LO PR	131	123	115	107	102	99	91	82	74	66	58	53	50	41	33	25	17

## DFH120

100 % Capacity

	OUTDOOR AMBIENT TEMPERATURE																
	65	60	55	50	47	45	40	35	30	25	20	17	15	10	5	0	-5
MBh	152.46	142.24	132.19	122.31	116.00	111.23	99.23	88.27	79.34	72.67	67.68	65.00	61.60	53.10	44.60	36.10	27.60
T/R	35.26	33.22	31.17	29.13	27.90	26.75	23.87	21.23	19.08	17.48	16.28	15.63	14.81	12.77	10.73	8.68	6.64
KW	10.92	10.66	10.41	10.15	10.00	9.90	9.64	9.39	9.13	8.88	8.62	8.47	8.36	8.11	7.85	7.60	7.34
AMPS	41.0	39.9	38.8	37.6	37.0	36.5	35.4	34.3	33.2	32.1	31.0	30.3	29.9	28.8	27.6	26.5	25.4
COP	4.09	3.91	3.72	3.53	3.40	3.29	3.02	2.76	2.55	2.40	2.30	2.25	2.16	1.92	1.66	1.39	1.10
Hi PR	391	378	365	353	345	340	327	314	302	289	276	269	264	251	238	226	213
LO PR	139	131	122	113	108	105	96	87	79	70	61	56	53	44	35	27	18

Calculations are based on nominal CFM and 70 °F indoor dry bulb.

Amps = Outdoor unit amps (comp.+fan)

Note: Shaded area is AHRI Rating Conditions at 47°F outdoor ambient temperature

kW = Total system power

# Electrical Data

Model Number	Electrical Rating	Compressor			Outdoor Fan Motor			Indoor Fan Motor			Optional Electric Heat			Optional Powered Convenience Outlet	Optional Power Exhaust	Power Supply	
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	PART #	KW*	FLA	FLA	FLA	MCA	MOP
DFH0903D	208/230/3/60	2	13.1	83.1	2	0.5	2.7	1	2.4	8	-	-	-	-	-	43.0/43.0	50/50
											-	-	-	9.6/8.7	-	52.6/51.7	60/60
											-	-	-	-	3.3/3.0	46.3/46.0	50/50
											-	-	-	9.6/8.7	3.3/3.0	55.9/54.7	60/60
											EH*D-3M15	11.3/15.0	31.3/36.1	-	-	82.1/88.1	90/90
														9.6/8.7	-	91.7/96.8	100/100
														-	3.3/3.0	85.4/91.1	90/100
											9.6/8.7	3.3/3.0	95.0/99.8	100/100			
											EH*D-3M30	22.5/30.0	62.5/72.2	-	-	121/133	125/150
														9.6/8.7	-	131/142	150/150
														-	3.3/3.0	124/136	125/150
											9.6/8.7	3.3/3.0	134/145	150/150			
											EH*D-3M45	33.8/45.0	93.8/108	-	-	160/178	175/200
														9.6/8.7	-	170/187	175/200
														-	3.3/3.0	164/181	175/200
											9.6/8.7	3.3/3.0	173/190	175/200			
DFH0903L	208/230/3/60	2	13.1	83.1	2	0.5	2.7	1	2.4	8	-	-	-	-	-	43.0/43.0	50/50
											-	-	-	9.6/8.7	-	52.6/51.7	60/60
											-	-	-	-	3.3/3.0	46.3/46.0	50/50
											-	-	-	9.6/8.7	3.3/3.0	55.9/54.7	60/60
											EH*D-3M15	11.3/15.0	31.3/36.1	-	-	82.1/88.1	90/90
														9.6/8.7	-	91.7/96.8	100/100
														-	3.3/3.0	85.4/91.1	90/100
											9.6/8.7	3.3/3.0	95.0/99.8	100/100			
											EH*D-3M30	22.5/30.0	62.5/72.2	-	-	121/133	125/150
														9.6/8.7	-	131/142	150/150
														-	3.3/3.0	124/136	125/150
											9.6/8.7	3.3/3.0	134/145	150/150			
											EH*D-3M45	33.8/45.0	93.8/108	-	-	160/178	175/200
														9.6/8.7	-	170/187	175/200
														-	3.3/3.0	164/181	175/200
											9.6/8.7	3.3/3.0	173/190	175/200			
DFH0903W	208/230/3/60	2	13.1	83.1	2	0.5	2.7	1	3.5	10.9	-	-	-	-	-	45.9/45.9	50/50
											-	-	-	9.6/8.7	-	55.5/54.6	60/60
											-	-	-	-	3.3/3.0	49.2/48.9	60/60
											-	-	-	9.6/8.7	3.3/3.0	58.8/57.6	70/70
											EH*D-3M15	11.3/15.0	31.3/36.1	-	-	85.0/91.0	90/100
														9.6/8.7	-	94.6/99.7	100/100
														-	3.3/3.0	88.3/94.0	90/100
											9.6/8.7	3.3/3.0	97.9/103	100/110			
											EH*D-3M30	22.5/30.0	62.5/72.2	-	-	124/136	125/150
														9.6/8.7	-	134/145	150/150
														-	3.3/3.0	127/139	150/150
											9.6/8.7	3.3/3.0	137/148	150/150			
											EH*D-3M45	33.8/45.0	93.8/108	-	-	163/181	175/200
														9.6/8.7	-	173/190	175/200
														-	3.3/3.0	166/184	175/200
											9.6/8.7	3.3/3.0	176/193	200/200			
DFH0904D	460/3/60	2	6.1	41	2	0.5	1.4	1	2.4	5.4	-	-	-	-	-	21.9	25
											-	-	-	4.3	-	26.2	30
											-	-	-	-	1	22.9	25
											-	-	-	4.3	1	27.2	30
											EH*D-4M15	15	18	-	-	44.5	45
														4.3	-	48.8	50
														-	1	45.5	50
											4.3	1	49.8	50			
											EH*D-4M30	30	36.1	-	-	67.0	70
														4.3	-	71.3	80
														-	1	68.0	70
											4.3	1	72.3	80			
											EH*D-4M45	45	54.1	-	-	89.6	90
														4.3	-	93.9	100
														-	1	90.6	100
											4.3	1	94.9	100			

# Electrical Data

Model Number	Electrical Rating	Compressor			Outdoor Fan Motor			Indoor Fan Motor			Optional Electric Heat			Optional Powered Convenience Outlet	Optional Power Exhaust	Power Supply	
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	PART #	KW*	FLA	FLA	FLA	MCA	MOP
DFH0904L	460/3/60	2	6.1	41	2	0.5	1.4	1	2.4	5.4	-	-	-	-	-	21.9	25
											-	-	-	4.3	-	26.2	30
											-	-	-	-	1	22.9	25
											-	-	-	4.3	1	27.2	30
											EH*D-4M15	15	18	-	-	44.5	45
														4.3	-	48.8	50
														-	1	45.5	50
											EH*D-4M30	30	36.1	4.3	1	49.8	50
														-	-	67.0	70
														4.3	-	71.3	80
											EH*D-4M45	45	54.1	-	-	89.6	90
														4.3	-	93.9	100
-	1	90.6	100														
-	-	-	4.3	1	94.9	100											
DFH0904W	460/3/60	2	6.1	41	2	0.5	1.4	1	3.5	7.2	-	-	-	-	-	23.7	30
											-	-	-	4.3	-	28.0	35
											-	-	-	-	1	24.7	30
											-	-	-	4.3	1	29.0	35
											EH*D-4M15	15	18	-	-	46.3	50
														4.3	-	50.6	60
														-	1	47.3	50
											EH*D-4M30	30	36.1	4.3	1	51.6	60
														-	-	68.8	70
														4.3	-	73.1	80
											EH*D-4M45	45	54.1	-	-	91.4	100
														4.3	-	95.7	100
-	1	92.4	100														
-	-	-	4.3	1	96.7	100											
DFH0907D	575/3/60	2	4.4	33	2	0.5	1	1	2.4	4	-	-	-	-	-	15.8	20
											-	-	-	3.5	-	19.3	20
											-	-	-	-	1.7	17.0	20
											-	-	-	3.5	1.7	20.5	25
											EH*D-7M15	15	14.4	-	-	33.8	35
														3.5	-	37.3	40
														-	1.7	35.0	40
											EH*D-7M30	30	28.9	3.5	1.7	38.5	40
														-	-	51.9	60
														3.5	-	55.4	60
											EH*D-7M45	45	43.3	-	-	53.1	60
														3.5	1.7	56.6	60
-	-	69.9	70														
3.5	-	73.4	80														
-	1.7	71.1	80														
-	-	-	3.5	1.7	74.6	80											
DFH0907L	575/3/60	2	4.4	33	2	0.5	1	1	2.4	4	-	-	-	-	-	15.8	20
											-	-	-	3.5	-	19.3	20
											-	-	-	-	1.7	17.0	20
											-	-	-	3.5	1.7	20.5	25
											EH*D-7M15	15	14.4	-	-	33.8	35
														3.5	-	37.3	40
														-	1.7	35.0	40
											EH*D-7M30	30	28.9	3.5	1.7	38.5	40
														-	-	51.9	60
														3.5	-	55.4	60
											EH*D-7M45	45	43.3	-	-	53.1	60
														3.5	1.7	56.6	60
-	-	69.9	70														
3.5	-	73.4	80														
-	1.7	71.1	80														
-	-	-	3.5	1.7	74.6	80											

# Electrical Data

Model Number	Electrical Rating	Compressor			Outdoor Fan Motor			Indoor Fan Motor			Optional Electric Heat			Optional Powered Convenience Outlet	Optional Power Exhaust	Power Supply	
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	PART #	KW*	FLA	FLA	FLA	MCA	MOP
DFH0907W	575/3/60	2	4.4	33	2	0.5	1	1	3.5	5	-	-	-	-	-	16.8	20
											-	-	-	3.5	-	20.3	25
											-	-	-	-	1.7	18.0	20
											-	-	-	3.5	1.7	21.5	25
											EH*D-7M15	15	14.4	-	-	34.8	35
														3.5	-	38.3	40
														-	1.7	36.0	40
											EH*D-7M30	30	28.9	3.5	1.7	39.5	40
														-	-	52.9	60
														3.5	-	56.4	60
											EH*D-7M45	45	43.3	-	-	57.6	60
														3.5	-	70.9	80
-	1.7	74.4	80														
-	-	-	3.5	1.7	75.6	80											
DFH1023D	208/230/3/60	2	15.9	110	2	0.33	2	1	2.4	8	-	-	-	-	-	47.8/47.8	60/60
											-	-	-	9.6/8.7	-	57.4/56.5	70/70
											-	-	-	-	3.3/3.0	51.1/50.8	60/60
											-	-	-	9.6/8.7	3.3/3.0	60.7/59.5	70/70
											EH*D-3M15	11.3/15.0	31.3/36.1	-	-	86.9/92.9	90/100
														9.6/8.7	-	96.5/102	100/110
														-	3.3/3.0	90.2/95.9	100/100
											EH*D-3M30	22.5/30.0	62.5/72.2	9.6/8.7	3.3/3.0	99.8/105	100/110
														-	-	126/138	150/150
														9.6/8.7	-	136/147	150/150
											EH*D-3M45	33.8/45.0	93.8/108	-	-	129/141	150/150
														9.6/8.7	3.3/3.0	139/150	150/150
-	-	165/183	175/200														
9.6/8.7	-	175/192	175/200														
-	3.3/3.0	168/186	175/200														
9.6/8.7	3.3/3.0	178/195	200/200														
DFH1023L	208/230/3/60	2	15.9	110	2	0.33	2	1	2.4	8	-	-	-	-	-	47.8/47.8	60/60
											-	-	-	9.6/8.7	-	57.4/56.5	70/70
											-	-	-	-	3.3/3.0	51.1/50.8	60/60
											-	-	-	9.6/8.7	3.3/3.0	60.7/59.5	70/70
											EH*D-3M15	11.3/15.0	31.3/36.1	-	-	86.9/92.9	90/100
														9.6/8.7	-	96.5/102	100/110
														-	3.3/3.0	90.2/95.9	100/100
											EH*D-3M30	22.5/30.0	62.5/72.2	9.6/8.7	3.3/3.0	99.8/105	100/110
														-	-	126/138	150/150
														9.6/8.7	-	136/147	150/150
											EH*D-3M45	33.8/45.0	93.8/108	-	-	129/141	150/150
														9.6/8.7	3.3/3.0	139/150	150/150
-	-	165/183	175/200														
9.6/8.7	-	175/192	175/200														
-	3.3/3.0	168/186	175/200														
9.6/8.7	3.3/3.0	178/195	200/200														
DFH1023W	208/230/3/60	2	15.9	110	2	0.33	2	1	3.5	10.9	-	-	-	-	-	50.7/50.7	60/60
											-	-	-	9.6/8.7	-	60.3/59.4	70/70
											-	-	-	-	3.3/3.0	54.0/53.7	60/60
											-	-	-	9.6/8.7	3.3/3.0	63.6/62.4	70/70
											EH*D-3M15	11.3/15.0	31.3/36.1	-	-	89.8/95.8	90/100
														9.6/8.7	-	99.4/104	100/110
														-	3.3/3.0	93.1/98.8	100/100
											EH*D-3M30	22.5/30.0	62.5/72.2	9.6/8.7	3.3/3.0	103/107	110/110
														-	-	129/141	150/150
														9.6/8.7	-	138/150	150/150
											EH*D-3M45	33.8/45.0	93.8/108	-	-	132/144	150/150
														9.6/8.7	3.3/3.0	142/153	150/175
-	-	168/186	175/200														
9.6/8.7	-	178/195	200/200														
-	3.3/3.0	171/189	175/200														
9.6/8.7	3.3/3.0	181/198	200/200														

# Electrical Data

Model Number	Electrical Rating	Compressor			Outdoor Fan Motor			Indoor Fan Motor			Optional Electric Heat			Optional Powered Convenience Outlet	Optional Power Exhaust	Power Supply	
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	PART #	KW*	FLA	FLA	FLA	MCA	MOP
DFH1024D	460/3/60	2	7.1	52	2	0.33	0.85	1	2.4	5.4	-	-	-	-	-	23.0	30
											-	-	-	4.3	-	27.3	30
											-	-	-	-	1	24.0	30
											-	-	-	4.3	1	28.3	35
											EH*D-4M15	15	18	-	-	45.5	50
														4.3	-	49.8	50
														-	1	46.5	50
											EH*D-4M30	30	36.1	4.3	1	50.8	60
														-	-	68.1	70
														4.3	-	72.4	80
											EH*D-4M45	45	54.1	-	1	69.1	70
														4.3	1	73.4	80
-	-	90.6	100														
-	-	-	4.3	-	94.9	100											
-	-	-	-	1	91.6	100											
-	-	-	4.3	1	95.9	100											
DFH1024L	460/3/60	2	7.1	52	2	0.33	0.85	1	2.4	5.4	-	-	-	-	-	23.0	30
											-	-	-	4.3	-	27.3	30
											-	-	-	-	1	24.0	30
											-	-	-	4.3	1	28.3	35
											EH*D-4M15	15	18	-	-	45.5	50
														4.3	-	49.8	50
														-	1	46.5	50
											EH*D-4M30	30	36.1	4.3	1	50.8	60
														-	-	68.1	70
														4.3	-	72.4	80
											EH*D-4M45	45	54.1	-	1	69.1	70
														4.3	1	73.4	80
-	-	90.6	100														
-	-	-	4.3	-	94.9	100											
-	-	-	-	1	91.6	100											
-	-	-	4.3	1	95.9	100											
DFH1024W	460/3/60	2	7.1	52	2	0.33	0.85	1	3.5	7.2	-	-	-	-	-	24.8	30
											-	-	-	4.3	-	29.1	35
											-	-	-	-	1	25.8	30
											-	-	-	4.3	1	30.1	35
											EH*D-4M15	15	18	-	-	47.3	50
														4.3	-	51.6	60
														-	1	48.3	50
											EH*D-4M30	30	36.1	4.3	1	52.6	60
														-	-	69.9	70
														4.3	-	74.2	80
											EH*D-4M45	45	54.1	-	1	70.9	80
														4.3	1	75.2	80
-	-	92.4	100														
-	-	-	4.3	-	96.7	100											
-	-	-	-	1	93.4	100											
-	-	-	4.3	1	97.7	100											
DFH1027D	575/3/60	2	5.1	39.5	2	0.33	0.67	1	2.4	4	-	-	-	-	-	16.9	20
											-	-	-	3.5	-	20.4	25
											-	-	-	-	1.7	18.1	20
											-	-	-	3.5	1.7	21.6	25
											EH*D-7M15	15	14.4	-	-	34.9	35
														3.5	-	38.4	40
														-	1.7	36.1	40
											EH*D-7M30	30	28.9	3.5	1.7	39.6	40
														-	-	53.0	60
														3.5	-	56.5	60
											EH*D-7M45	45	43.3	-	1.7	54.2	60
														3.5	1.7	57.7	60
-	-	71.0	80														
-	-	-	3.5	-	74.5	80											
-	-	-	-	1.7	72.2	80											
-	-	-	3.5	1.7	75.7	80											

# Electrical Data

Model Number	Electrical Rating	Compressor			Outdoor Fan Motor			Indoor Fan Motor			Optional Electric Heat			Optional Powered Convenience Outlet	Optional Power Exhaust	Power Supply												
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	PART #	KW*	FLA	FLA	FLA	MCA	MOP											
DFH1027L	575/3/60	2	5.1	39.5	2	0.33	0.67	1	2.4	4	-	-	-	-	-	16.9	20											
											-	-	-	3.5	-	20.4	25											
											-	-	-	-	1.7	18.1	20											
											-	-	-	3.5	1.7	21.6	25											
											EH*D-7M15	15	14.4	-	-	34.9	35											
														3.5	-	38.4	40											
														-	1.7	36.1	40											
											EH*D-7M30	30	28.9	3.5	1.7	39.6	40											
														-	-	53.0	60											
														3.5	-	56.5	60											
											EH*D-7M45	45	43.3	-	-	57.7	60											
														3.5	1.7	71.0	80											
														-	1.7	72.2	80											
											-	-	-	3.5	1.7	75.7	80											
											DFH1027W	575/3/60	2	5.1	39.5	2	0.33	0.67	1	3.5	5	-	-	-	-	-	17.9	20
																						-	-	-	3.5	-	21.4	25
-	-	-	-	1.7	19.1	20																						
-	-	-	3.5	1.7	22.6	25																						
EH*D-7M15	15	14.4	-	-	35.9	40																						
			3.5	-	39.4	40																						
			-	1.7	37.1	40																						
EH*D-7M30	30	28.9	3.5	1.7	40.6	45																						
			-	-	54.0	60																						
			3.5	-	57.5	60																						
EH*D-7M45	45	43.3	-	-	58.7	60																						
			3.5	1.7	72.0	80																						
			-	1.7	73.2	80																						
-	-	-	3.5	1.7	76.7	80																						
DFH1203D	208/230/3/60	2	15.6	110	2	0.5	2.7	1	3.5	10.9												-	-	-	-	-	51.5/51.5	60/60
																						-	-	-	9.6/8.7	-	61.1/60.2	70/70
											-	-	-	-	3.3/3.0	54.8/54.5	70/70											
											-	-	-	9.6/8.7	3.3/3.0	64.4/63.2	80/70											
											EH*D-3M15	11.3/15.0	31.3/36.1	-	-	90.6/96.6	100/100											
														9.6/8.7	-	100/105	110/110											
														-	3.3/3.0	93.9/99.6	100/100											
											EH*D-3M30	22.5/30.0	62.5/72.2	9.6/8.7	3.3/3.0	103/108	110/110											
														-	-	130/142	150/150											
														9.6/8.7	-	139/150	150/175											
											EH*D-3M45	33.8/45.0	93.8/108	-	-	133/145	150/150											
														9.6/8.7	3.3/3.0	143/153	150/175											
														-	-	169/187	175/200											
											-	-	-	9.6/8.7	-	178/196	200/200											
											-	-	-	9.6/8.7	3.3/3.0	172/190	175/200											
											-	-	-	9.6/8.7	3.3/3.0	182/199	200/200											
DFH1203L	208/230/3/60	2	15.6	110	2	0.5	2.7	1	3.5	10.9	-	-	-	-	-	51.5/51.5	60/60											
											-	-	-	9.6/8.7	-	61.1/60.2	70/70											
											-	-	-	-	3.3/3.0	54.8/54.5	70/70											
											-	-	-	9.6/8.7	3.3/3.0	64.4/63.2	80/70											
											EH*D-3M15	11.3/15.0	31.3/36.1	-	-	90.6/96.6	100/100											
														9.6/8.7	-	100/105	110/110											
														-	3.3/3.0	93.9/99.6	100/100											
											EH*D-3M30	22.5/30.0	62.5/72.2	9.6/8.7	3.3/3.0	103/108	110/110											
														-	-	130/142	150/150											
														9.6/8.7	-	139/150	150/175											
											EH*D-3M45	33.8/45.0	93.8/108	-	-	133/145	150/150											
														9.6/8.7	3.3/3.0	143/153	150/175											
														-	-	169/187	175/200											
											-	-	-	9.6/8.7	-	178/196	200/200											
											-	-	-	9.6/8.7	3.3/3.0	172/190	175/200											
											-	-	-	9.6/8.7	3.3/3.0	182/199	200/200											


# Electrical Data

Model Number	Electrical Rating	Compressor			Outdoor Fan Motor			Indoor Fan Motor			Optional Electric Heat			Optional Powered Convenience Outlet	Optional Power Exhaust	Power Supply	
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	PART #	KW*	FLA	FLA	FLA	MCA	MOP
DFH1203W	208/230/3/60	2	15.6	110	2	0.5	2.7	1	5	14.5	-	-	-	-	-	55.1/55.1	70/70
											-	-	-	9.6/8.7	-	64.7/63.8	80/70
											-	-	-	-	3.3/3.0	58.4/58.1	70/70
											-	-	-	9.6/8.7	3.3/3.0	68.0/66.8	80/80
											EH*D-3M15	11.3/15.0	31.3/36.1	-	-	94.2/100	100/110
														9.6/8.7	-	104/109	110/110
														-	3.3/3.0	97.5/103	100/110
											EH*D-3M30	22.5/30.0	62.5/72.2	9.6/8.7	3.3/3.0	107/112	110/125
														-	-	133/145	150/150
														-	3.3/3.0	143/154	150/175
											EH*D-3M45	33.8/45.0	93.8/108	9.6/8.7	3.3/3.0	137/148	150/150
														-	-	146/157	150/175
														-	3.3/3.0	172/190	175/200
											-	-	-	9.6/8.7	-	182/199	200/200
											-	-	-	-	3.3/3.0	176/193	200/200
-	-	-	9.6/8.7	3.3/3.0	185/202	200/225											
DFH1204D	460/3/60	2	7.8	52	2	0.5	1.4	1	3.5	7.2	-	-	-	-	-	27.5	35
											-	-	-	4.3	-	31.8	35
											-	-	-	-	1	28.5	35
											-	-	-	4.3	1	32.8	40
											EH*D-4M15	15	18	-	-	50.0	60
														4.3	-	54.3	60
														-	1	51.0	60
											EH*D-4M30	30	36.1	4.3	1	55.3	60
														-	-	72.6	80
														4.3	-	76.9	80
											EH*D-4M45	45	54.1	-	-	73.6	80
														4.3	1	77.9	80
														-	-	95.1	100
											-	-	-	4.3	-	99.4	100
											-	-	-	-	1	96.1	100
-	-	-	4.3	1	100	110											
DFH1204L	460/3/60	2	7.8	52	2	0.5	1.4	1	3.5	7.2	-	-	-	-	-	27.5	35
											-	-	-	4.3	-	31.8	35
											-	-	-	-	1	28.5	35
											-	-	-	4.3	1	32.8	40
											EH*D-4M15	15	18	-	-	50.0	60
														4.3	-	54.3	60
														-	1	51.0	60
											EH*D-4M30	30	36.1	4.3	1	55.3	60
														-	-	72.6	80
														4.3	-	76.9	80
											EH*D-4M45	45	54.1	-	-	73.6	80
														4.3	1	77.9	80
														-	-	95.1	100
											-	-	-	4.3	-	99.4	100
											-	-	-	-	1	96.1	100
-	-	-	4.3	1	100	110											
DFH1204W	460/3/60	2	7.8	52	2	0.5	1.4	1	5	10.6	-	-	-	-	-	30.9	40
											-	-	-	4.3	-	35.2	45
											-	-	-	-	1	31.9	40
											-	-	-	4.3	1	36.2	45
											EH*D-4M15	15	18	-	-	53.4	60
														4.3	-	57.7	60
														-	1	54.4	60
											EH*D-4M30	30	36.1	4.3	1	58.7	60
														-	-	76.0	80
														4.3	-	80.3	90
											EH*D-4M45	45	54.1	-	-	77.0	80
														4.3	1	81.3	90
														-	-	98.5	100
											-	-	-	4.3	-	103	110
											-	-	-	-	1	99.5	100
-	-	-	4.3	1	104	110											

# Electrical Data

Model Number	Electrical Rating	Compressor			Outdoor Fan Motor			Indoor Fan Motor			Optional Electric Heat			Optional Powered Convenience Outlet		Optional Power Exhaust		Power Supply										
		QTY	RLA	LRA	QTY	HP	FLA	QTY	HP	FLA	PART #	KW*	FLA	FLA	FLA	MCA	MOP											
DFH1207D	575/3/60	2	5.8	38.9	2	0.5	1	1	3.5	5	-	-	-	-	-	20.1	25											
											-	-	-	3.5	-	23.6	25											
											-	-	-	-	1.7	21.3	25											
											-	-	-	3.5	1.7	24.8	30											
											EH*D-7M15	15	14.4	-	-	38.2	40											
														3.5	-	41.7	45											
														-	1.7	39.4	40											
											EH*D-7M30	30	28.9	3.5	1.7	42.9	45											
														-	-	56.2	60											
														3.5	-	59.7	60											
											EH*D-7M45	45	43.3	-	1.7	57.4	60											
														3.5	1.7	60.9	70											
														-	-	74.3	80											
											DFH1207L	575/3/60	2	5.8	38.9	2	0.5	1	1	3.5	5	-	-	-	-	-	20.1	25
																						-	-	-	3.5	-	23.6	25
-	-	-	-	1.7	21.3	25																						
-	-	-	3.5	1.7	24.8	30																						
EH*D-7M15	15	14.4	-	-	38.2	40																						
			3.5	-	41.7	45																						
			-	1.7	39.4	40																						
EH*D-7M30	30	28.9	3.5	1.7	42.9	45																						
			-	-	56.2	60																						
			3.5	-	59.7	60																						
EH*D-7M45	45	43.3	-	1.7	57.4	60																						
			3.5	1.7	60.9	70																						
			-	-	74.3	80																						
DFH1207W	575/3/60	2	5.8	38.9	2	0.5	1	1	5	7.2												-	-	-	-	-	22.3	25
																						-	-	-	3.5	-	25.8	30
											-	-	-	-	1.7	23.5	30											
											-	-	-	3.5	1.7	27.0	30											
											EH*D-7M15	15	14.4	-	-	40.4	45											
														3.5	-	43.9	45											
														-	1.7	41.6	45											
											EH*D-7M30	30	28.9	3.5	1.7	45.1	50											
														-	-	58.4	60											
														3.5	-	61.9	70											
											EH*D-7M45	45	43.3	-	1.7	59.6	60											
														3.5	1.7	63.1	70											
														-	-	76.5	80											
											EH*D-7M45	45	43.3	3.5	-	80.0	80											
														-	1.7	77.7	80											
3.5	1.7	81.2	90																									





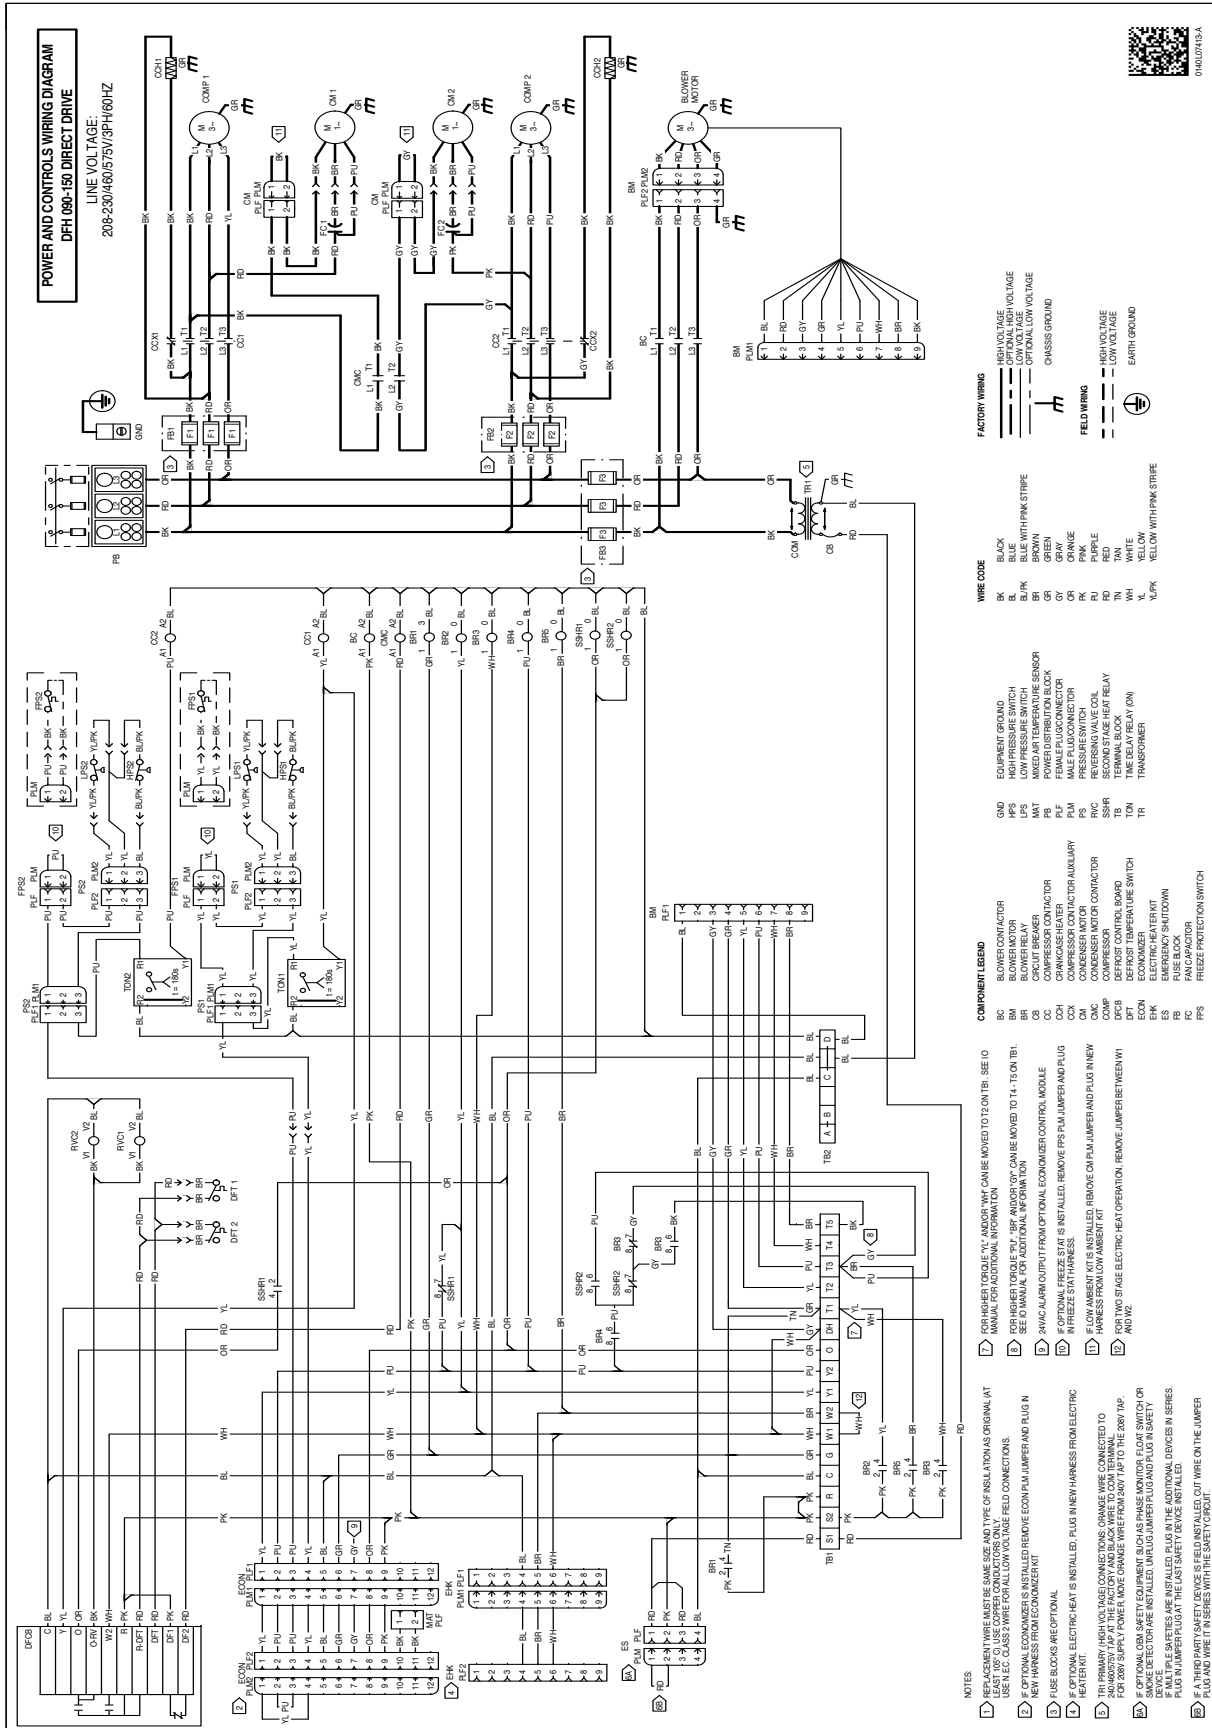






**WARNING**

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram on the unit for the most up-to-date wiring.

Model Size	DIM "A"
DFH 090	6½
DFH 102	6½
DFH 120	6½

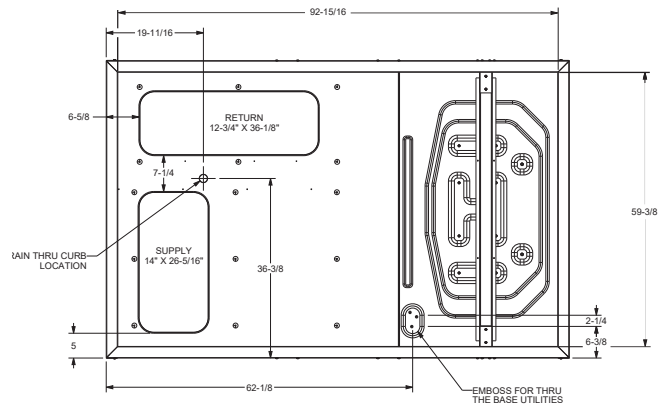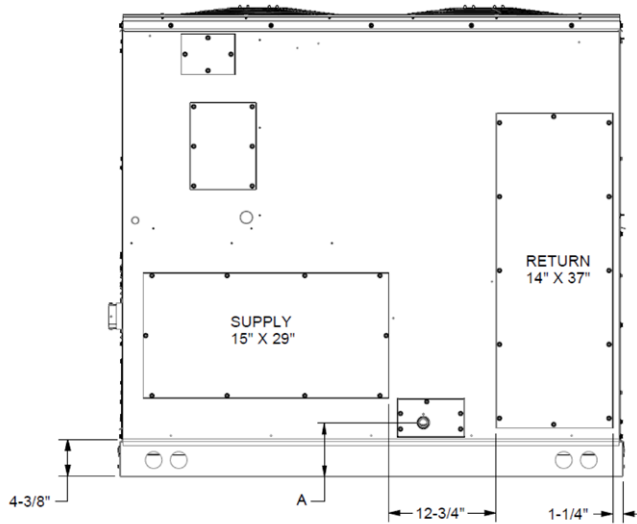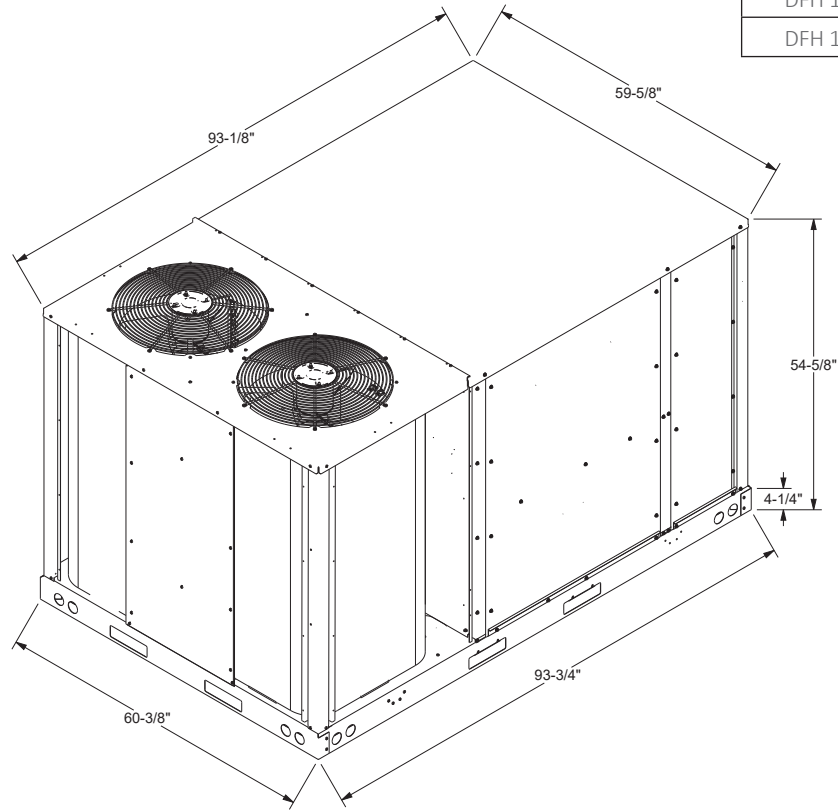


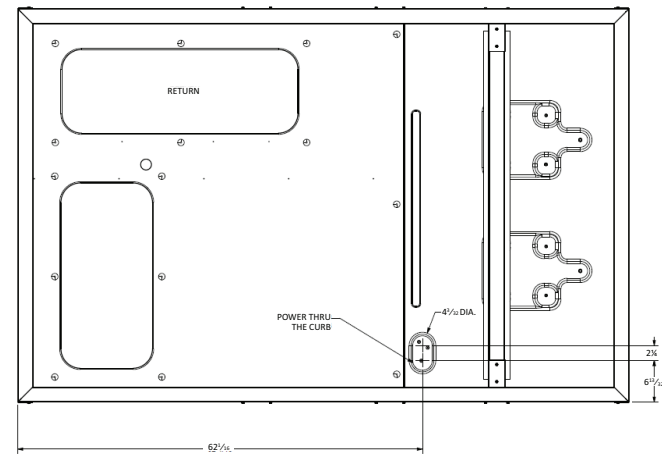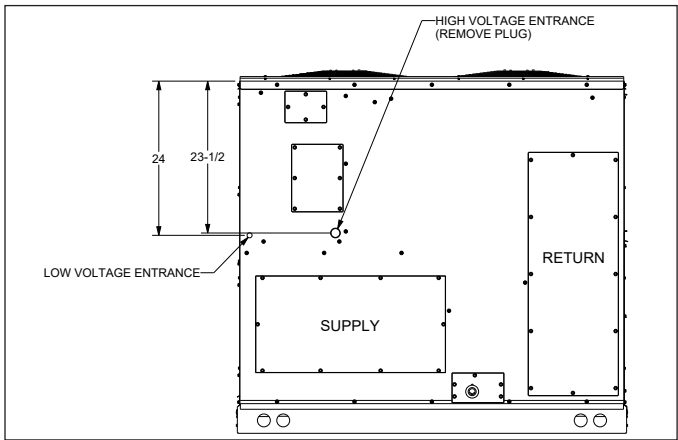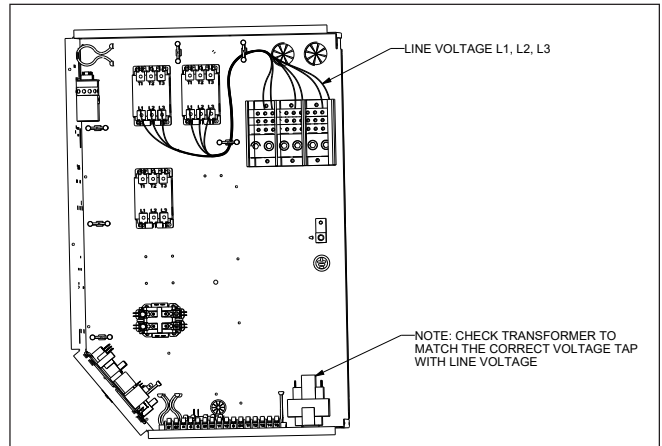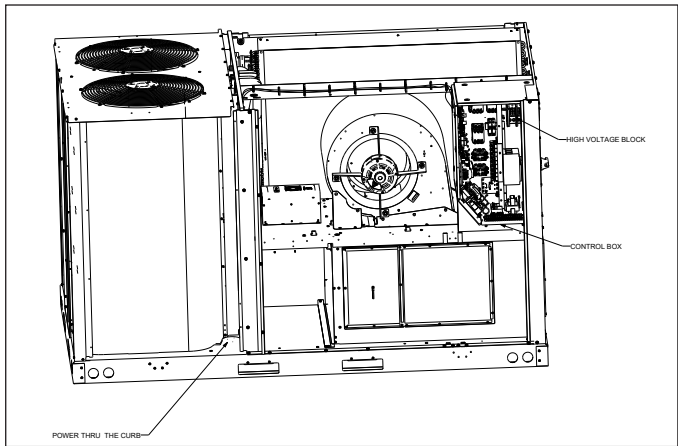

## Unit Clearances

### Service Clearance

Allow for recommended service clearances as shown in figure to the right. In situations that have multiple units, a 36" minimum clearance is required between the condenser coils. A clearance of 48" is recommended on all sides of the unit to allow service access and to ensure proper ventilation and condenser airflow. The top of the unit should be unobstructed. Provide a roof walkway along the sides of the unit for service and access to controls and components. Contact your Daikin sales representative for service requirements less than those recommended.

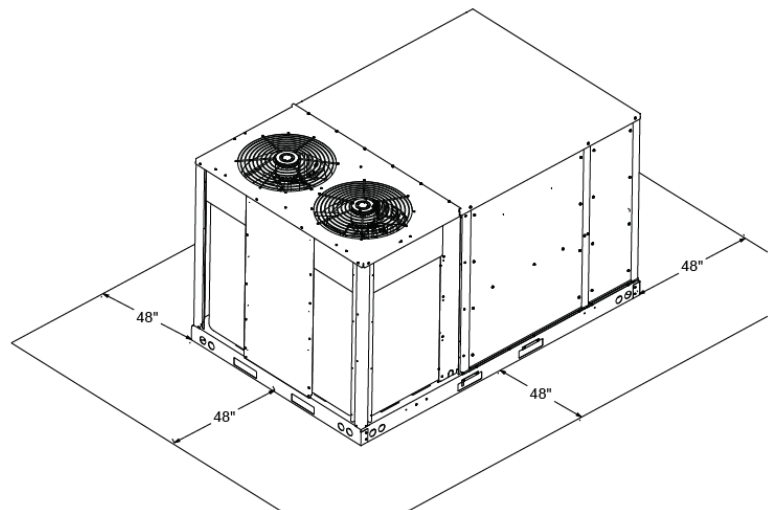

**UNIT CLEARANCES**

## Unit Location

The structural engineer must verify that the roof has adequate support and ability to minimize deflection. Take extreme caution when using on a wooden roof structure. Unit condenser coils should be in a location that avoids any heated exhaust air.

Allow sufficient space around the unit for maintenance/service clearance. Consult your Daikin sales representative if available clearances do not meet minimum recommendations.

Where code considerations, such as the NEC, require extended clearances, these take precedence.

Provisions for forks have been included in the unit base frame. No other fork locations are approved.


- » Unit must be lifted by the four lifting holes located at the base frame corners.
- » Lifting cables should be attached to the unit with shackles.
- » The distance between the crane hook and the top of the unit must not be less than 60".
- » Two spreader bars must span over the unit to prevent damage to the cabinet by the lift cables. Spreader bars must be of sufficient length so that cables do not come in contact with the unit during transport. Remove wood struts mounted beneath unit base

frame before setting unit on roof curb. These struts are intended to protect unit base frame from forklift damage. To remove the struts, extract the sheet metal retainers and pull the struts through the base of the unit. Refer to rigging label on the unit.

**Important:** If using bottom discharge with roof curb, ductwork should be attached to the curb prior to installing the unit. Refer to the Roof Curb Installation Instructions for proper curb installation. Curbing must be installed in compliance with the National Roofing Contractors Association Manual. Lower unit carefully onto roof mounting curb. While rigging the unit, the center of gravity will cause the condenser end to be lower than the supply air end. Bring condenser end of unit into alignment with the curb. With condenser end of the unit resting on curb member and using curb as a fulcrum, lower opposite end of the unit until entire unit is seated on the curb. When a rectangular cantilever curb is used, take care to center the unit. Check for proper alignment and orientation of supply and return openings with duct.

## Roof Curb Installation

The roof curb is field-assembled and must be installed level (within 1/16" per foot side to side). A sub-base must be constructed by the contractor in applications involving pitched roofs. Gaskets are furnished and must be installed between the unit and curb. For proper installation, follow NRCA guidelines. In applications requiring post and rail installation, an I-beam securely mounted on multiple posts should support the unit on each side. In addition, the insulation on the underside of the unit should be protected from the elements. Applications in geographic areas subjected to seismic or hurricane conditions must meet code requirements for fastening the unit to the curb and the curb to the building structure. For further and more detailed information please refer to our Daikin Light Commercial Packaged unit IOD.

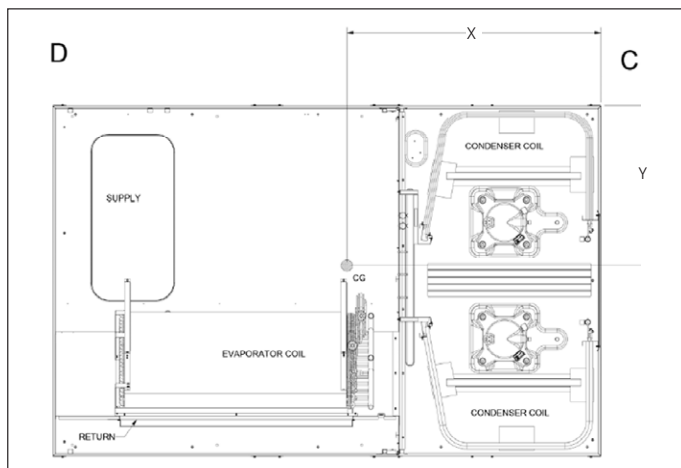

CORNER & CENTER-OF-GRAVITY LOCATIONS

## Weights

Model	Shipping Weight (lbs)	Operating Weight (lbs)	Corner Weights (lbs)				Length X (in)	Width Y (in)
			A	B	C	D		
DFH090	1200	1120	226	282	342	350	45	26
DFH102	1214	1134	302	224	381	227	41	27
DFH120	1234	1154	271	286	353	244	39	28

For details on accessories refer to document **PM-LC-ACCESSORIES**





---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---



---

